

IEEE Catalog Number : CFP1587H-ART
ISBN : 978-1-4673-7800-0



Proceedings of 2015 4th International Conference on Instrumentation, Communications, Information Technology, and Biomedical Engineering

Science and Technology for Future Health

Institut Teknologi Bandung | November 2-3, 2015

Organized By:



Proceedings

**2015 4th International Conference on
Instrumentation, Communications,
Information Technology,
and Biomedical Engineering
(ICICI-BME)**

November 2-3, 2015
Institut Teknologi Bandung
Bandung, Indonesia

Organized by:



Proceedings of

**2015 4th International Conference on Instrumentation, Communications,
Information Technology, and Biomedical Engineering (ICICI-BME)**

Copyright © 2015 by the Institute of Electrical and Electronics Engineers, Inc.
All right reserved

Copyright and reprint permission

Abstracting is permitted with credit to the source. Libraries are permitted to photocopy beyond the limit of U.S. copyright law, for private use of patrons, those articles in this volume that carry a code at the bottom of the first page, provided the per-copy fee indicated in the code is paid through Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 1923

For other copying, reprint, or reproduction request should be addressed to IEEE Copyrights Manager, IEEE Service Center, 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331

ISBN: 978-1-4673-7800-0
IEEE Catalog Number: CFP1587H-ART

Additional copies of this publication are available from:

The 4th ICICI-BME 2015 Secretariat
Labtek VIII Building 3rd floor
Institut Teknologi Bandung
Phone/Fax: +62 22 2534117
Email: icicibme2015@gmail.com
Website: <http://icici-bme.itb.ac.id>

Preface

Wilujeng Sumping,

Welcome to 2015 Fourth International Conference on Instrumentation, Communications, Information Technology, and Biomedical Engineering (ICICI-BME), in Bandung, Indonesia.

On behalf of the organizing committee, we are delighted to welcome all of the participants to the ICICI-BME 2015. This biennial conference is organized under the auspices of the Institut Teknologi Bandung (ITB), Indonesian Sensor and Actuator System Society (ISASS), Indonesian Biomedical Engineering Society (IBES), and sponsored by the School of Electrical Engineering & Informatics, the Faculty of Mathematics & Natural Sciences, together with IEEE Indonesia EMB and CAS Chapters.

ICICI-BME is dedicated to the presentation and discussion of the latest developments and ideas in instrumentation, measurements, communications, information technology, and biomedical engineering, in both theory and application.

This conference also aims to strengthen the collaboration among international researchers, scientists, engineers, and industrial players in the fields of science and engineering. It is designed to be a meeting point for those who are involved, to globally exchange and share their views, ideas, and advances in science, technology, and industrial aspects.

Our gratitude to many people which helped making this conference a reality, to all of our invited speakers and guests, and for all of our committee members for their effort to ensure the success of this conference. Finally, we hope that all of participants will learn new things, make new contacts, get new ideas, and have fruitful discussion while having a pleasant experience during our conference in Bandung.

Hatur Nuhun, Thank You

Mitra Djamal & Tati L. R. Mengko
Chairs of ICICI-BME 2015

ICICI-BME 2015 Committee

GENERAL CHAIR

M. Djamal (ITB, Indonesia)
T. L. R. Mengko (ITB, Indonesia)

ADVISORY BOARD

K. Suryadi	(ITB, Indonesia)	H.-D. Liess	(UniBw Muenchen, Germany)
E. T. Baskoro	(ITB, Indonesia)	M. Liess	(RheinMain, Germany)
J. Sembiring	(ITB, Indonesia)	I. Nakajima	(Tokai, Japan)
I. N. P. Aryantha	(ITB, Indonesia)	M. Nuh	(ITS, Indonesia)
C. Badri	(UI, Indonesia)	J. Rodrigues	(UBI, Portugal)
E. Y. Chuang	(NTU, Taiwan)	K. Shimada	(JAXA, Japan)
Y. Fujii	(Gunma, Japan)	S. Soegijoko	(ITB, Indonesia)
H. Grain	(La Trobe, Australia)	A. B. Suksmono	(ITB, Indonesia)
M. Horprathum	(MST, Thailand)	Suprijanto	(ITB, Indonesia)
J. Kaewkhao	(NPRU, Thailand)	E. Supriyanto	(UTM, Malaysia)
D. Kurniadi	(ITB, Indonesia)	G. J. Verkerke	(Groningen, Netherlands)

PROGRAM COMMITTEE

D. Abdurrachim	(TuE, Netherlands)	A. Prakosa	(JHU, United States)
K. Adi	(Undip, Indonesia)	I. K. E. Purnama	(ITS, Indonesia)
W. Adiprawita	(ITB, Indonesia)	M. H. Purnomo	(ITS, Indonesia)
M. K. Agusta	(ITB, Indonesia)	D. Riana	(STMIK NM, Indonesia)
Y. Ansar	(ITB, Indonesia)	M. I. Rusydi	(Unand, Indonesia)
I. Arif	(ITB, Indonesia)	T. A. Sardjono	(ITS, Indonesia)
F. Haryanto	(ITB, Indonesia)	N. Syakrani	(Polban, Indonesia)
E. M. Idris	(ITB, Indonesia)	Suprijadi	(ITB, Indonesia)
A. A. Iskandar	(UI, Indonesia)	W. Siswomihardjo	(UGM, Indonesia)
S. N. Khotimah	(ITB, Indonesia)	H. Zakaria	(ITB, Indonesia)
A. I. Mahyuddin	(ITB, Indonesia)	I. Zakia	(ITB, Indonesia)

ORGANIZING COMMITTEE

Astri Handayani
Agung Wahyu Setiawan
Donny Danudirdjo
Muhammad Shiddiq Sayyid Hashuro
Habibur Muhaimin
Misuari Sabirin
Donny Mirza
Rizki Putra Prastio
Agwin Fahmi Fahanani
Dian Rahmawati
Rebecca Chyntia

Adhelia Ekarani
Tiper Uniplaita
Koespriyandito
Rahma Dewi
Mochamad Irwan Nari
Ilman Himawan Kusumah
Amanatulhay Pribadi
Tuti Adi Tama Nasution
Johan Agathon
Raditya Artha
Aji Suryo

Table of Contents

KEYNOTE ADDRESS

Prognostication and Molecular Regulation of Acute Myeloid Leukemia: an Integration of Bioinformatics and Clinical Medicine	1
<i>Eric Y. Chuang</i>	
The Future of Cardiovascular Imaging	2
<i>Eko Supriyanto</i>	
Safety of Emerging Universal Technologies: Drone and Nano-Bubble Water	3
<i>Kazuhito Shimada</i>	
Luminescence from Lanthanides Doped Glasses and Applications: A Review	4
<i>Patarawagee Yasaka and Jakrapong Kaewkhao</i>	
Molecular Imaging of Cancer Cell Response to Chemotherapeutic Drugs Emphasized on P-glycoprotein Function	16
<i>Suchart Kothan</i>	
Abuse Prevention of Street Camera Network by Browsing-History Disclosure	17
<i>Yusaku Fujii, Noriaki Yoshiura, Naoya Ohta, and Akihiro Takita</i>	

PAPERS

Strength and Displacement of Open Cell Designs of Coronary Stent in Responding of Various Inflated Pressures	18
<i>Alva Edy Tontowi, Ivan Pratama, Hariadi Hariawan, Margareta Rinastiti, and Widowati Siswomihardjo</i>	
The Effect of Annealing Temperature on the Physical and Mechanical Properties of Stainless Steel 316L for Stent Application	22
<i>Muhammad Kusumawan Herliansyah, Punto Dewo, Marsetyawan H. N. E. Soesatyo, and Widowati Siswomihardjo</i>	
Evaluation of Various Alloys for Stent on Platelet Aggregation Activity	27
<i>Nahar Taufiq, Siti Sunarintyas, and Widowati Siswomihardjo</i>	
Changes of Arterial Stiffness during Flow-mediated Dilation Procedure	32
<i>Muhammad Shiddiq Sayyid Hashuro, Hasballah Zakaria, and Tati L. R. Mengko</i>	
Modelling and Simulation of Blood Circulation Towards Mitral Valve Replacement Risk Calculation	36
<i>Vera Höfflin, Amiliana M. Soesanto, Hananto Andriantoro, Eko Supriyanto, and Jens Haueisen</i>	
Electroencephalography (EEG) for Detecting Acute Ischemic Stroke	42
<i>Sastra Kusuma Wijaya, Cholid Badri, Jusuf Misbach, Tresna Priyana Soemardi, and V. Sutarmo</i>	

Semi-Automatic Determination of Root Canal Length in Dental X-ray Image	49
<i>I Ketut Eddy Purnama, Ima Kurniastuti, Margareta Rinastiti, and Mauridhi Hery Purnomo</i>	
Iris Image Analysis of Patient Chronic Renal Failure (CRF) using Watershed Algorithm.....	54
<i>Maya A. R. Sitorus, Mauridhi Hery Purnomo, and Adhi Dharma Wibawa</i>	
Features Extraction of Palm Vein Image Using Phase Symmetry	59
<i>Herry Setiawan and Eko Mulyanto Yuniarno</i>	
Extraction and Classification Texture of Inflammatory Cells and Nuclei in Normal Pap Smear Images	65
<i>Dwiza Riana, Dwi H. Widyantoro, and Tati L. Mengko</i>	
Automated Detection of Southeast Asian Ovalocytosis (SAO) Obtained from Thin Blood Smear Microphotographs	70
<i>Eunike Sawitning Ayu Setyono, Anto Satriyo Nugroho, Fuad Ughi, Made Gunawan, Vitria Pragesjvara, Ismail Ekoprayitno Rozi, and Puji Budi Setia Asih</i>	
Multi Patch Approach in K-Means Clustering Method for Color Image Segmentation in Pulmonary Tuberculosis Identification.....	75
<i>Riries Rulaningtyas, Andriyan Bayu Suksmono, Tati Mengko, and Putri Saptawati</i>	
Plasmodium Vivax Classification from Digitalization Microscopic Thick Blood Film Using Combination of Second Order Statistical Feature Extraction and K-Nearest Neighbor (K-NN) Classifier Method.....	79
<i>Farah Zakiyah Rahmanti, Sutojo, Novita Kurnia Ningrum, Niken Kartika Imania, and Mauridhi Hery Purnomo</i>	
Polyphonic Signal Analysis Using Cross-Correlation on Sasando	84
<i>Louis Ferdinand Boesday and Yoyon K. Suprpto</i>	
Steady-State Visual Evoked Potential based Brain Computer Interface: Experiment of LED Stimulation in Two-Rooms Condition	90
<i>Nugroho Budi Wicaksono, Tati L.R. Mengko, and Suprijanto</i>	
Heuristic Steady State Visual Evoked Potential Based Brain Computer Interface System for Robotic Wheelchair Application.....	94
<i>Stephen Andronicus, Nathaniel Chandra Harjanto, Suprijanto, and Augie Widyotriatmo</i>	
Noise and Artifact Reduction Based on EEMD Algorithm for ECG with Muscle Noises, Electrode Motions, and Baseline Drifts	98
<i>Amirinnisa D. Atrisandi, Widyawardana Adiprawita, Tati L. R. Mengko, and Yuan-Hsiang Lin</i>	
Automatic Segmentation and Detection of Heart Sound Components S1, S2, S3 and S4	103
<i>Amy H. Salman, Nur Ahmadi, Richard Mengko, Armein Z. R. Langi, and Tati L. R. Mengko</i>	
Study about Backhand Short Serve in Badminton Based on the Euler Angle	108
<i>Muhammad Ilhamdi Rusydi, Minoru Sasaki, Muhammad Hadi Sucipto, Zaini, and Noverika Windasari</i>	

Fluid Flow Velocity Measurement Using Dual-Ultrasonic Transducer by Means of Simultaneously Transit Time Method	113
<i>K. Amri, L. F. Wiranata, Suprijanto, and D. Kurniadi</i>	
Application of Standing Waves as Audible Information in Hypertension Therapy	117
<i>Friedhelm Pohl, Yudha Noor Aditya, Christine Pohl, and Eko Supriyanto</i>	
Hardware Implementation of Linear Back-Projection Algorithm for Capacitance Tomography.....	124
<i>Hans Herdian, Imamul Muttakin, Almushfi Saputra, Arbai Yusuf, Wahyu Widada, and Warsito P. Taruno</i>	
Rocket Booster Effect on RKX-200TJ Flight Stability	130
<i>Herma Yudhi Irwanto</i>	
Development of Mechanical Coupling For Piezoelectric Energy Harvester Adapted to Low-Frequency Vibration.....	134
<i>Tri Untoro, Suprijanto, and Estiyanti Ekawati</i>	
Prototype Instruments for Determination of Aroma and Flavor Quality of Brewed Black Tea.....	138
<i>Irsyad Waluyo Blit, Adinda Bunga Juwita, Suprijanto, and Nugraha</i>	
Development of Laboratory-Scale Electrical Impedance Tomography Imaging System	143
<i>Muhammad Hutomo Padmanaba, Faisal Ardhy, Ihsan Hariadi, and Hasballah Zakaria</i>	
A Prototype of Compact Digital Holographic Microscope with Mach-Zehnder Configuration	149
<i>Dodi Zulherman, Undiana Bambang, Donny Danudirdjo, and Andriyan B. Suksmono</i>	
Design of Root Canal Treatment for Dental Post Application on Maxillary Central Incisor.....	153
<i>Suci Sansita Susanto, Satrio Wicaksono, Andi Isra Mahyuddin, Tatacipta Dirgantara, Gantini Subrata, Sandro Mihradi, and Anthony Sugiharta Budiaman</i>	
Initial Estimation of Landmark Location for Automated Cephalometric Analysis Using Template Matching Method	159
<i>Indira Pramita Sari, Retno Widayati, Menik Priaminiarti, Donny Danudirdjo, and Tati Latifah Mengko</i>	
A Comparison of Classification Methods in Vertebral Column Disorder with the Application of Genetic Algorithm and Bagging	163
<i>Rizki Tri Prasetyo and Dwiza Riana</i>	
Image Based Transesophageal Echocardiography Probe Tip Localization	169
<i>Fatin Inani binti Nurullail, Christina Pahl, and Eko Supriyanto</i>	
Nailfold Capillaroscopy Image Processing for Morphological Parameters Measurement.....	175
<i>Arya Tama, Tati R. Mengko, and Hasballah Zakaria</i>	
Beef Quality Identification using Color Analysis and K-Nearest Neighbor Classification.....	180
<i>Kusworo Adi, Sri Pujiyanto, Oky Dwi Nurhayati, and Adi Pamungkas</i>	

The Synthesis of Javanese Woman's Facial Image on Anger Expression Based on Emotion Regulation	185
<i>Ulla Delfana Rosiani, Adi Atmoko, Surya Sumpeno, and Mauridhi Hery Purnomo</i>	
3D Point Cloud Data Registration Based on Multiview Image Using SIFT Method For Djago Temple Relief Reconstruction.....	191
<i>Fawaidul Badri, Eko Mulyanto Yuniarno, and Supeno Mardi Susiki N.</i>	
Ontology Driven Knowledge Base for High Risk Pregnancy Management.....	196
<i>Jostinah Lam, Yudha Aditya Noor, and Eko Supriyanto</i>	
Mother and Children Health Reporting System: Innovative Information System Application in the Rural West Bandung Area, Indonesia, by Using Multimodal Communications Systems.....	202
<i>Ahmad Faried, Agung Budi Sutiono, Tono Djuwantono, Muhammad Zafrullah Arifin, Firman Fuad Wirakusumah, Sony Ari Yuniarto, Hadi Hariyanto, and Yudi Tri Jayadi</i>	
Validating Video Stimulus for Eliciting Human Emotion: A Preliminary Study for e-Health Monitoring System	208
<i>Lantana Dioren Rumpa, Adhi Dharma Wibawa, Mauridhi Heri Purnomo, and Harmelia Tulak</i>	
Text-to-Speech Device for Patients with Low Vision.....	214
<i>Annisa Istiqomah Arrahmah, Aulia Rahmatika, Samantha Harisa, Hasballah Zakaria, and Richard Mengko</i>	
"Learn-to-read" Application for Remediation of Dyslexic Children Based on Multisensory Approach	220
<i>Muhamad Risqi Utama Saputra and Kuntoro Adi Nugroho</i>	
Decision Support System Prototype on Obstetrics Ultrasonography for Primary Service Physicians.....	226
<i>Boy Subirosa Sabarguna, Sastra Kusuma Wijaya, Farian Sakinah, and Atiek Maryati</i>	
Mobile Cataract Detection using Optimal Combination of Statistical Texture Analysis	232
<i>Yunendah Nur Fuadah, Agung W. Setiawan, Tati L. R. Mengko, and Budiman</i>	
Assessment of Prolonged Tissue Response to Porous-Iron Implant by Radiodensity Approach	237
<i>Sitaria Fransiska Siallagan, Gunanti, Arlita Sariningrum, Devi Paramitha, Mokhamad Fakhrol Ulum, Hendra Hermawan, and Deni Noviana</i>	
The Study of Intracellular Reactive Oxygen Species and Mitochondrial Membrane Potential in Normal Cells Exposed to Diagnostic X ray.....	241
<i>Montree Tungjai, Jiraporn Kantapan, Yutthana Bunmakat, and Suchart Kothan</i>	
Radiation Parameter Study of Bismuth Containing Sodium Calcium Borosilicate Glasses	244
<i>Wasu Cheewasukhanont, Kitipun Boonin, Pruittipol Limkitjaroenporn, and Jakrapong Kaewkhao</i>	
Enhanced 1057 nm Luminescence Peak and Radiative Properties of Laser Pump Nd ³⁺ -doped Sodium Borate Glasses	248
<i>M. Djamal, J. Rajagukguk, R. Hidayat, Suprijadi, and J. Kaewkhao</i>	

Fabrication and Characterization of All-Plastic Flexible Microfluidic Chip using Thermal Lamination of Patterned Sheet.....	254
<i>Willy Wijaya and Henri P. Uranus</i>	
Optical Spectroscopy of Dy ³⁺ doped Lithium Borate Glasses for Luminescence Applications	260
<i>Benchaphorn Damdee, Keerati Kirdsiri, and Jakrapong Kaewkhao</i>	
Optical Properties and Judd-Ofelt Analysis of Dy ³⁺ doped MgO-BaO-P ₂ O ₅ Glass Systems.....	264
<i>Yaowaluk Tariwong, Natthakridta Chanthima, Jakrapong Kaewkhao, and Narong Sangwaranatee</i>	
A Study of Photon Interaction and Radiation Shielding Properties of BaO:Na ₂ O:SiO ₂ :B ₂ O ₃ Glasses	268
<i>Sunisa Sarachai, Natthakridta Chanthima, Jakrapong Kaewkhao, Nisakorn Sangwaranatee, and Narong Sangwaranatee</i>	
Design of IP Based On-Board Computer for Small Satellite.....	272
<i>Emir Husni, Angga Putra, and Nazmi Febrian</i>	
Mobile Monitoring System for Indonesian Volcano	278
<i>Maria Evita, Mitra Djamal, Bernd Zimanowski, and Klaus Schilling</i>	
Fixed-Mode of Mobile Monitoring System for Indonesian Volcano.....	282
<i>Maria Evita, Mitra Djamal, Bernd Zimanowski, and Klaus Schilling</i>	
Coordinated Trajectory Tracking for A Group of Mixed Wheeled Mobile Robots	288
<i>Sisdarmanto Adinandra and Dwi Ana Ratnawati</i>	
Measurement and Analysis of 3G WCDMA Network Performance – Case Study: Yogyakarta Indonesia	294
<i>Tito Yuwono and Fitrah Ferdiyanto</i>	
Comparative Performance Evaluation of DSRC and Wi-Fi Direct in VANET	298
<i>Nurain Izzati Shuhaimi, Heriansyah, and Tutun Juhana</i>	
Android Smart Home System based on ATmega16.....	304
<i>Medilla Kusriyanto and Beny Setiawan</i>	
Electromyography Microcontroller Leg Brace Processing Software	308
<i>Michael Marwono Gondokusumo, Arko Djajadi, and Fuad Ughi</i>	
Model Development for RF Ablation Using Bipolar Forceps in Cancer Therapy	313
<i>Evan Wijaya Tanotogono, Suprijanto, and Janivita Joto Sudirham</i>	
Simulation of Tablet Dissolution Rate on Virtual USP Dissolution Apparatus.....	319
<i>Narendra Kurnia Putra, Suprijanto, Janivita Sudirham, and Saleh Wikarsa</i>	
Characterizing the Hearing Comfort in Intensive Care Unit Using Objective and Subjective Evaluation	323
<i>Joko Sarwono, Ezra Tandian, Andika Rizki, Sentagi Utami, and Ressay Yanti</i>	

Validated Visible Spectrophotometry for Quantitative Analysis of Pirenoxine in The Presence of Paraben Preservatives in Eye Drop Preparations.....	327
<i>Hendri Wasito and Chutima Phechkrajang</i>	
Effect of Temperature in The Encapsulation of Temulawak Extract with Yeast <i>Saccharomyces Cereviceae</i>	332
<i>Olyvia Sentosa, Katherine, and Asaf Kleopas Sugih</i>	

Steady-State Visual Evoked Potential based Brain Computer Interface: Experiment of LED Stimulation in Two-Rooms Condition

Nugroho Budi Wicaksono¹, Tati L.R. Mengko², and Suprijanto³

¹Department of Medical Instrumentation, Politeknik Mekatronika Sanata Dharma, Yogyakarta, Indonesia
(E-mail: nugroho@pmsd.ac.id)

²School of Electrical and Informatics, Institut Teknologi Bandung, Bandung, Indonesia
(E-mail: tatimengko@yahoo.com)

³Faculty of Industrial Technology, Institut Teknologi Bandung, Bandung, Indonesia
(E-mail: supri@tf.itb.ac.id)

Abstract - The aim of this study is to determine the effect of room's light condition to brain response. Brain response to repetitive visual stimulation is called Steady-State Visual Evoked Potential (SSVEP) based Brain-Computer Interface (BCI). In this study, flickering Light Emitting Diode (LED) is used as visual stimulation. Mostly, brain response is recorded using electroencephalograph (EEG) and recorded in the brain's occipital lobe that is associated with human vision. Welch's method of power spectral estimation is implemented for estimating the power spectral of recorded signal. The result shows that the highest-power of brain response to repetitive visual stimulus can be detected either in the dark-room or in the bright-room.

Keywords—Brain-Computer Interface (BCI), Steady-State Visual Evoked Potential (SSVEP), Power Spectral Estimation, Highest-Power Detection, LED Visual Stimulation.

I. INTRODUCTION

Brain Computer Interface (BCI) is interfacing device communicates human brain to an external device, so called computer system. Pires [1] defines BCI system as a new type interface system that can extend human capabilities, especially for people who suffered from severe motor disabilities.

According to Grainmann's BCI concept map [2], implementation strategy of Steady-State Visual Evoked Potential (SSVEP) is classified as selective attention that use flickering light as external stimulation. SSVEP relies in brain response properties when stimulated with periodic presentation of visual stimulus (such as flickering/blinking light) [3]. When the subject focus on the visual stimulus, then the occipital lobe also resonates at any given frequency of visual stimulus.

Because of its dependencies on ocular muscle SSVEP based BCI is not applicable for people who cannot control the extra ocular muscle. However, compared to another internally driven BCI (i.e.: motor imagery), the number of commands that can be generated using BCI SSVEP are much more than internally driven BCI [4]. The number of electrodes that are used in BCI SSVEP less than another implementation strategy (i.e.: P3000, motor imagery, slow cortical potential).

The aim of this study is to determine the effect of room's light condition to brain response using LED as an external stimulation. This study is a preliminary study towards implementation using computer screen as an external stimulation.

II. METHODS

A. Human Brain Anatomy

The major motor and sensory area of cerebral cortex are frontal lobe, parietal lobe, temporal lobe, and occipital lobe. Each area has its functions. Conscious perception of visual stimulus from the eyes is processed in occipital lobe [5]. Because of its specific function to visual stimulus, in this study we were only monitoring the occipital lobe.

B. Electroencephalograph (EEG) and Visual Stimulator

To monitor and record brain activities, we used Emotiv EEG Neuroheadset [6] as shown in figure 1. EEG records brain's electrical activity by using electrodes. The electrodes are attached to the scalp. Emotiv EEG Neuroheadset is used as data acquisition device in this study. It has been designed for practical research application.

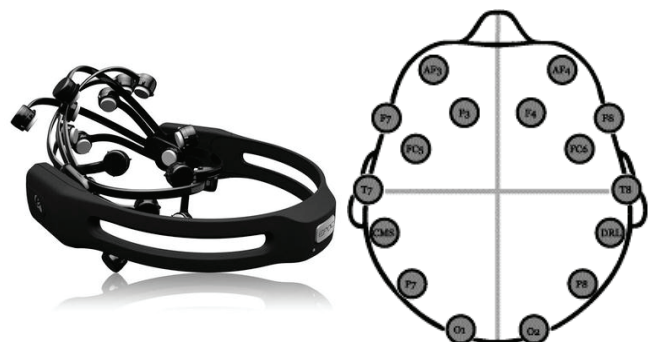


Fig. 1. Emotiv EEG Neuroheadset and electrodes location.

To record brain activity, the Emotiv EEG Neuroheadset uses fourteen electrodes (AF3, F7, F3, FC5, T7, P7, O1, O2, P8, T8,

FC6, F4, F8, and AF4) that need to be wetted with a saline solution. The electrode position use international convention of 10-20 locations [6]. The Emotiv EEG also contains a two-axis gyroscope used to determine the position of the head. It uses proprietary wireless, 2.4GHz band and has 128 samples per second per channel. The ADC is in 14 bits, 1 LSB equals to 0.51 μ V.

Sugiarto in [7] mentions that visual stimulus using LED is more flexible to choose the frequency stimulation. Frequency of LED driven stimulus depends on the LED characteristics and the capability of the embedded controller. The side effect of LED-driven stimulus is user fatigue because of its high intensity (>5000 cd/m²).

We use microcontroller to control LED flickering frequency. The frequency was from 5 Hz up to 38 Hz in 3-Hz step (5 Hz, 8 Hz, 11 Hz, ..., 38 Hz) and the LED color is white.

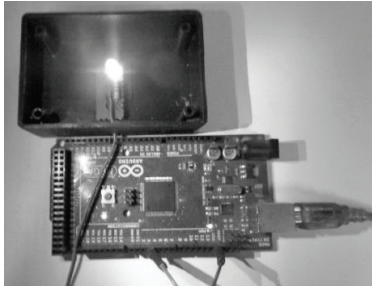


Fig. 2. Implementation of white-colored LED stimulation

C. Welch's Power Spectrum Estimation

Before recorded EEG signals were processed using Welch's power spectrum estimation, the EEG signals were filtered using a 4-40 Hz band pass filter. Welch method is the modification of Bartlett method. The input signals are divided into several overlapped segments. The window function then applied to each segment.

Using this method [8], input signals $x[j]$, $j = 0, 1, \dots, N-1$, divided into several segments. The first input segment is $x_1[j]$ $j = 0, 1, \dots, L-1$. Then,

$$x_1[j] = x[j] \quad j = 0, 1, \dots, L-1, \quad (1)$$

the second segment,

$$x_2[j] = x[j+D] \quad j = 0, 1, \dots, L-1. \quad (2)$$

and finally,

$$x_k[j] = x[j + (K-1)D]. \quad (3)$$

K is the number of segmented signals, then $D = \frac{N-L}{K-1}$.

Window function of $w[j]$, $j = 0, 1, \dots, L-1$ was applied for each segments with the length of L to compute the periodogram. The result of multiplication each segments with the window function forms a new sequences from

$X_1[n]w[j] \dots X_k[n]w[j]$. Then, take the Fourier finite transform $A_1[n], \dots, A_k[n]$ of this sequences using

$$A_k[n] = \frac{1}{L} \sum_{j=1}^{L-1} x_k[j] w[j] e^{-2i\pi jn/L}, \text{ and } i = \sqrt{-1}. \quad (4)$$

From these steps, we obtain k modified periodogram,

$$I_k[f_n] = \frac{L}{U} |A_k[n]|^2, \quad (5)$$

where

$$f_n = \frac{n}{L}, \quad n = 0, \dots, L/2 \quad (6)$$

and

$$U = \frac{1}{L} \sum_{j=1}^{L-1} w^2[j]. \quad (7)$$

The average of modified periodogram is the spectral estimation:

$$\bar{P}[f_n] = \frac{1}{k} \sum_{k=1}^k I_k[f_n]. \quad (8)$$

D. Laboratory Experiment Configuration

The subject was seated in a comfortable chair in front of the LED visual stimulus with a distance of about 40 cm. There are 24 Experiments in total, 12 experiments in dark room condition and 12 experiments in bright-room condition. The duration of each experiment approximately 10 seconds. LED visual stimulus also only flicks for approximately 10 seconds for each experiments. When an experiment is finished, there are no other visual stimulus that given to the subject.



Fig. 3. Experiment in the bright-room condition.

III. RESULT AND DISSCUSSION

In this section, we present the result of signal processing in dark and bright-room conditions, and the comparison between the LED visual stimulus frequency and the highest power spectrum estimation detected in frequency domain.

The first experiments were conducted in dark-room condition. The raw EEG signal from channel O1 with 14 Hz visual stimulus frequency is shown in figure 4 and the filtered EEG signal is shown in figure 5. Figure 6 shows power spectrum estimation using Welch method. In this experiments, Welch method uses Hamming as a window function, and 50% overlap. The exact frequency value of highest power detected from figure 6 is 13.88 Hz. It shows that when LED flickers at 14 Hz the brain's occipital lobe mostly resonate at the given frequency.

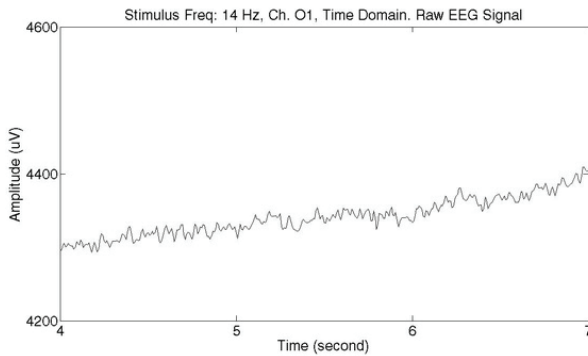


Fig. 4. Raw EEG signal, channel O1, and 14 Hz stimulus frequency

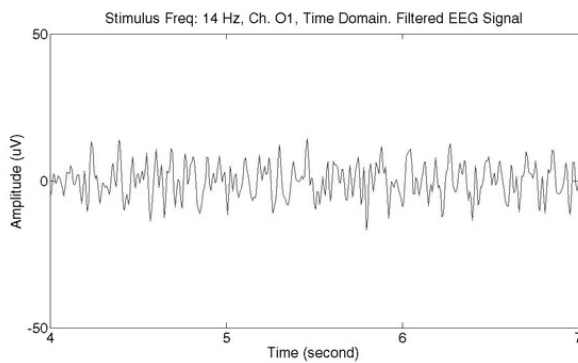


Fig. 5. Filtered EEG signal, channel O1, and 14 Hz stimulus frequency

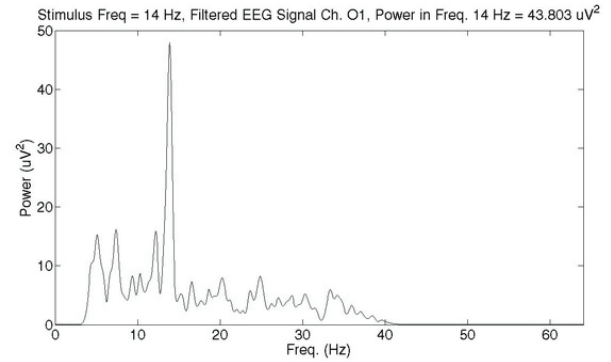


Fig. 6. Welch's power spectrum estimation from filtered EEG signal, channel O1, and 14 Hz stimulus frequency. Dark-room condition.

The second experiments were conducted in bright-room condition. Figure 7 shows power spectrum estimation using Welch method, the exact frequency value of highest power detected from figure 7 is 13.94 Hz.

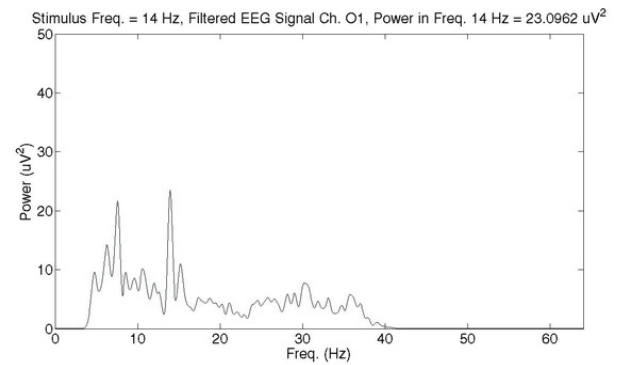


Fig. 7. Welch's power spectrum estimation from filtered EEG signal, channel O1, and 14 Hz stimulus frequency. Bright-room condition.

TABLE I
SUMMARY OF 24 EXPERIMENTS CONDUCTED IN DARK-ROOM AND BRIGHT-ROOM CONDITION

Stimulus Frequency	Dark-Room Condition		Bright-Room Condition	
	Channel O1 Dominant Freq. (Power - μV^2)	Channel O2 Dominant Freq. (Power - μV^2)	Channel O1 Dominant Freq. (Power - μV^2)	Channel O2 Dominant Freq. (Power - μV^2)
5 Hz	4.37 Hz (22.61)	5.19 Hz (26.49)	4.81 Hz (17.21)	7.56 Hz (25.23)
8 Hz	6.56 Hz (25.20)	7.88 Hz (28.96)	7.56 Hz (20.39)	11.69 Hz (42.30)
11 Hz	9.50 Hz (21.22)	5.31 Hz (24.45)	9.00 Hz (16.25)	10.31 Hz (29.76)
14 Hz	13.88 Hz (47.96)	13.88 Hz (48.45)	13.94 Hz (23.47)	13.81 Hz (28.25)
17 Hz	16.68 Hz (47.37)	16.69 Hz (44.70)	9.19 Hz (17.30)	9.31 Hz (25.89)
20 Hz	8.18 Hz (24.84)	11.07 Hz (27.07)	19.13 Hz (20.92)	9.56 Hz (24.43)
23 Hz	10.25 Hz (19.25)	10.19 Hz (32.88)	6.94 Hz (25.40)	11.75 Hz (26.08)
26 Hz	5.62 Hz (22.28)	25.07 Hz (21.16)	10.38 Hz (20.79)	11.44 Hz (30.70)
29 Hz	8.18 Hz (27.66)	8.93 Hz (27.60)	4.94 Hz (26.22)	4.94 Hz (39.86)
32 Hz	13.31 Hz (18.48)	7.93 Hz (21.56)	9.69 Hz (18.07)	5.50 Hz (27.68)
35 Hz	5.75 Hz (22.94)	6.93 Hz (24.20)	8.31 Hz (19.21)	14.13 Hz (22.55)
38 Hz	10.37 Hz (23.09)	11.94 Hz (35.66)	9.75 Hz (16.49)	9.69 Hz (30.87)

Table 1 shows the summary of all experiments, in the dark-room condition and bright-room condition. The table shows that if the stimulus frequency is less than or equal to 17 Hz, then the occipital lobe mostly also resonates at any given stimulus frequency either in the dark-room condition or bright-room condition.

Highest power detection at frequency domain gives some false detection. The example of false detection occurs in bright-room condition at channel O2 and 5 Hz stimulation frequency, it is can be caused by the body muscle movement artefact or electrode drift artefact.

When visual stimulus frequency is more than 17 Hz, the highest power detection mostly gives false results. But, at any given stimulus frequency a peak power appeared but its power mostly lower than power in 5 Hz - 17 Hz frequency range. For example is shown in figure 8. When the stimulus frequency is 35 Hz there is a peak power appears in 35.38 Hz, but its power is lower than a power at 5.75 Hz.

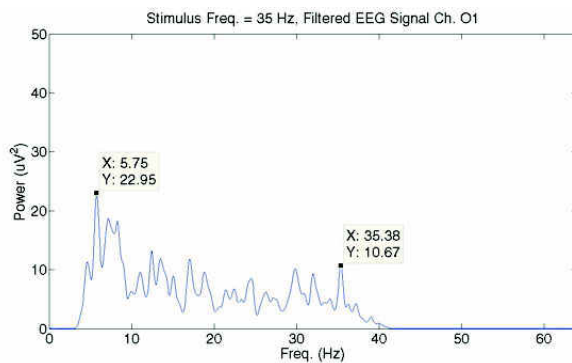


Fig. 8. Welch's power spectrum estimation from filtered EEG signal, channel O1, and 35 Hz stimulus frequency. Dark-room condition.

IV. CONCLUSION

The highest power detection using Welch's power spectrum estimation is more reliable for visual stimulus frequency less than or equal to 17 Hz and the result shows that the highest-power of brain response on frequency domain to repetitive visual stimulus can be detected either in the dark-room or in the bright-room.

Basically, at any given stimulation frequency brain's occipital lobe also resonate at a similar frequency. But, if the stimulation frequency is higher than 17 Hz the power is difficult to be detected. For future work, it needs a method or calculations to compensate the power spectrum estimation.

REFERENCES

- 1 G. Pires, M. C. Branco, and U. Nunes, "Visual P300-Based BCI to Steer a Wheelchair: A Bayesian Approach," *30th Annual International IEEE EMBS Conference Vancouver*, British Columbia, Canada, 2008, pp. 658-661.
- 2 B. Graimann, B. Allison, and G. Pfurtscheller, "Brain-Computer Interfaces: A Gentle Introduction," in *Brain-Computer Interfaces: Revolutionizing Human-Computer Interaction*, Eds. B. Graimann, B. Allison, and G. Pfurtscheller, Springer, 2010, pp. 1-27.
- 3 N. Chumerin, N. V. Manyakov, M. v. Vliet, A. Robben, *et al.*, "Preprocessing and Decoding Steady-State Visual Evoked Potentials for Brain-Computer Interfaces," in *Digital Image and Signal Processing for Measurement Systems*, Ed. R. Duro and F. L. Pena, River Publishers, 2012, pp. 1-33.
- 4 H. Bakardjian, "Optimization of SSVEP for Robust BCI," Dissertation, Department of Electronic and Information Engineering, Tokyo University of Agriculture and Technology, 2010.
- 5 F. H. Martini, J. L. Nath, and E. F. Bartholomew, *Fundamentals of Anatomy & Physiology*, 9th Ed. San Francisco, USA: Benjamin Cummings, 2012.
- 6 Emotiv. (2012). *Emotiv Software Development Kit: User Manual for Release 1.0.0.3*.
- 7 I. Sugiarto, "Stimulator SSVEP-BCI dengan OpenGL," *Konferensi Nasional Sistem Informasi 2009*, Yogyakarta, Indonesia, 2009.
- 8 P. D. Welch, "The Use of Fast Fourier Transform for the Estimation of Power Spectra: A Method based on Time Averaging over Short, Modified Periodograms," *IEEE Transactions on Audio and Electroacoustics*, vol. 15, pp. 70-73, 1967.

Sponsored by:



Institut Teknologi Bandung
School of Electrical Engineering and Informatics
Faculty of Mathematics and Natural Sciences

Technically Co-Sponsored by:



IEEE Indonesia – EMB Chapter
IEEE Indonesia – CAS Chapter

Supported by:

School of Life Sciences and Technology, ITB
Center for Instrumentation Technology and Automation (CITA)
Center for Health and Technology and Sport Science (CHTSS)
Indonesian Data Mining Society (IndoDM)
Research Center on Information and Communication Technology (RCICT)



Submission 7

Conference

News

EasyChair


ICICI-BME 2015 Submission 7

Submission information updates are disabled.

For all questions related to processing your submission you should contact the conference organizers. [Click here to see information about this conference.](#)

All **reviews sent to you** can be found at the bottom of this page.

Submission 7

Title	Steady-State Visual Evoked Potential based Brain Computer Interface: Experiment of LED Stimulation in Two-Rooms Condition
Submission:	 (Oct 06, 10:51 GMT) (previous versions)
Author keywords	Brain-Computer Interface (BCI) Steady-State Visual Evoked Potential (SSVEP) Power Spectral Estimation Highest-Power Detection LED Visual Stimulation
Topics	Biomedical Signal Processing
Abstract	The aim of this study is to determine the effect of room's light condition to brain response. Brain response to repetitive visual stimulation is called Steady-State Visual Evoked Potential (SSVEP) based Brain-Computer Interface (BCI). In this study, flickering Light Emitting Diode (LED) is used as visual stimulation. Mostly, brain response is recorded using electroencephalograph (EEG) and recorded in the brain's occipital lobe that is associated with human vision. Welch's method of power spectral estimation is implemented for estimating the power spectral of recorded signal. The result shows that the highest-power of brain response to

Submitted	repetitive visual stimulus can be detected either in the dark-room or in the bright-room. Jul 28, 08:23 GMT
Last update	Jul 28, 08:23 GMT

Authors						
first name	last name	email	country	affiliation	Web page	corresponding?
Nugroho Budi	Wicaksono	nugroho.budi.wicaksono@gmail.com	Indonesia	Politeknik Mekatronika Sanata Dharma		✓
Tati L.R.	Mengko	tatimengko@yahoo.com	Indonesia	Institut Teknologi Bandung		
	Suprijanto	supri@tf.itb.ac.id	Indonesia	Institut Teknologi Bandung		

Reviews

Review 1	
Review	
Review	<p>This paper is good idea, but any corrections for for improvement :</p> <ol style="list-style-type: none"> 1. Please explain whether there is a pattern between stimulus frequency and dominant frequency in every condition 2. Please correct writing of reference

Review 2	
Review	
Review	<p>The paper is well written and the title is well suited for this conference. The work presented in this paper will give a good information to the potential conference audiences especially if the field of EEG signal acquisition and EEG signal processing.</p>