



DEPARTMENT OF MECHANICAL AND
INDUSTRIAL ENGINEERING
UNIVERSITAS
GADJAH MADA




AUN/SEED-Net 

Proceeding



The 4th International Conference
on Product Design & Development



In conjunction with
The 4th AUN/SEED-Net
Regional Conference on Manufacturing
"Innovation on Product Design and Manufacturing
for Better Life"

November, 9th-10th 2011
Grand Quality Hotel, Yogyakarta



The 4th International Conference
on Product Design & Development

In conjunction with

**The 4th AUN/SEED-Net
Regional Conference on Manufacturing**

November, 9th – 10th 2011
Yogyakarta, Indonesia

DEPARTMENT OF MECHANICAL AND INDUSTRIAL ENGINEERING
FACULTY OF ENGINEERING UNIVERSITAS GADJAH MADA



UNIVERSITAS
GADJAH MADA



In colaboration with

AUN/SEED-Net



THE 4th INTERNATIONAL CONFERENCE ON PRODUCT DESIGN AND
DEVELOPMENT IN CONJUNCTION WITH THE 4th AUN/SEED-Net
REGIONAL CONFERENCE ON MANUFACTURING PROCEEDING

All right reserved

Copyright © 2011 by Department of Mechanical and Industrial Engineering, Faculty of
Engineering, Universitas Gadjah Mada

Published by

Department of Mechanical and Industrial Engineering
Faculty of Engineering, Universitas Gadjah Mada
Jalan Grafika no 2 Kampus UGM, Yogyakarta 55281
INDONESIA

Telp : +62 274 521673, Fax. +62 274 521673

ISBN 978-979-97986-7-1

The editors were Dona Febrianti, Agus Pahala Simbolon, and Melisa Indriyani

The cover was designed by Ismail Fahmi

FOREWORDS

The rapid paces of product design and development realm in its relation to the manufacturing processes have led to an era in the challenging product development. The application of all techniques will require the combined ideas, experiences, and services of scientist, practitioners, and entrepreneurs in a wide variety of discipline.

In recognition of this, we anticipated the need of a Conference on Product Design and Development with the main theme "Innovation on Product Design and Manufacturing for Better Life" for its continuous presence for 4 years. The conference become more special since it is held in conjunction with the Regional Conference on Manufacturing. The purpose of such a conference is to provide an appropriate forum for the exchange of research experiences and outputs and to be a media for the collection and dissemination of the most updated technology, research, and knowledge in the field of product design and development and manufacturing.



With this in mind, an Organizing Committee was formed under the Department of Mechanical and Industrial Engineering of Gadjah Mada University and arrangements were made with the AUN/Seed-Net to support and act as host to the conference on November 9-10, 2011. We are delighted to inform you that we have such a great variety of participants today. As indicated we have the participants from 9 countries and 36 universities to present their best knowledge and discuss the essential topics during the conference.

Many thanks are due all stakeholders for their whole-hearted cooperation without which the conference would not have been a success.

Last but not least, on behalf of the Organizing Committee, let me officially welcome you to **the 4th International Conference on Product Design and Development in conjunction with the 4th Regional Conference on Manufacturing**. We do hope all of you have a very meaningful and fruitful experience through the conference and we wish you have a very pleasant stay in Yogyakarta.

Dr. I Gusti Bagus Budi Dharma
Chairperson

LIST OF REVIEWERS

Prof. Hideki Aoyama

Prof. Mohd Hamdi

Prof. Abdul Hakim Halim

Assoc. Prof. Dr. Manop Reodecho

Dr. Subagyo

Dr. Budi Dharma

Dr. Budi Hartono

Dr. Fauzun

Dr. Herianto

Dr. Muhammad Agung Bramantya

Dr. Muhammad Kusumawan Herliansyah

Dr. Muslim Mahardika

LIST OF COMMITTEES

Steering Committees

Dr. M. Waziz Wildan	(Universitas Gadjah Mada, Indonesia)
Dr. Subagyo	(Universitas Gadjah Mada, Indonesia)
Dr. Alva Edy Tontowi	(Universitas Gadjah Mada, Indonesia)
Prof. Hamdi Abd.Shukor	(University of Malaya)
Dr. Chai Kah Hin	(National University of Singapore)
Dr. Ian Gibson	(National University of Singapore)
Dr. Manob Reodecha	(Chulalongkorn University, Thailand)
Prof. Tadashi Ariga	(Tokai University, Japan)
Prof. Ari Ide-ektessabi	(Kyoto University, Japan)
Prof. Syeed Masood	(Swinburne University, Australia)
Prof. G. J. Verkeke	(University of Twente The Netherlands)
Dr. Andreas Dagman	(Chalmers University of Technology)

Organizing Committees

Dr. I Gusti Bagus Budi Dharma	Mr. Agus Darmawan
Dr. Nur Aini Masruroh	Ms. Fitri Trapsilawati
Dr. Rini Dharmastiti	Mr. Ilham Akbar Hari Wijaya
Dr. MK Herliansyah	Ms. Rierien Jessyntha Merischa Putri
Dr. Herianto	Ms. Anindita Noviandari
Dr. Gesang Nugroho	Mr. Dias Murtadho
Dr. Muhammad Agung Bramantya	Ms. Ariningtyas Kurniasih
Dr. M. Noer Ilman	Ms. Binda Anissa
Dr. Budi Hartono	Ms. Vannisa Amalia Luthfitriaputri
Dr. Nur Mayke Eka Normasari	Ms. Kurnia Rahmawati Sholihat
Dr. Hari Agung Yuniarto	Mr. Adrian Leo Hadipradata

Ms. Rizky Amalia Putri

Ms. Dhyana Paramita

Ms. Mutiara Hapsari

Ms. Amalia Kiswandari

Mr. Ismail Fahmi

Ms. Mufti Kenia Kusumawardani

Mr. Reza Amaludin

Ms. Dona Febrianti

Ms. Agus Pahala Simbolon

Ms. Melisa Indriyani

Ms. Larasati Kusumaningrum

Mr. Yowana Triwikanta

Mr. Dhanes Tanyo Pusponegoro

Mr. Tri Widayahno

Mr. Rifqi Ihtisyamuddin

Mr. Anandya Reza Pratama

LIST OF CONTENTS

COVER	i
FOREWORDS	iii
LIST OF REVIEWERS	iv
LIST OF COMMITTEES	v
LIST OF CONTENTS	vii

Cluster 1: Production Engineering

1	Analysis Influence of Organization Assets to Organization Competitive Advantage (Case Study in PT. X) <i>Augustina Asih Rumanti</i>	1
2	Analysis The Effects Of Innovation Performance To Product Sales (In Woven Industry Of Kain Tenun Ikat Troso Jepara) <i>Bambang Purwanggono, Dyah Ika Rinawati, Nur Annisa Amirina</i>	8
3	A Robust Design Approach To Enhance The Aesthetic Quality Of A Product Design: A PET Bottle Shape Case Study <i>Khusnun Widiyati, Hideki Aoyama</i>	16
4	A Simplified Sustainable Manufacturing Paradigm for Small Scale Gold Production Systems <i>Virginia Jose Soriano</i>	20
5	Cost Reduction in the Car Seat Manufacturing with Value Engineering and AHP Techniques <i>Adisak Nowneow, Ruephuwan Chantrasa</i>	28
6	Design and Development of Quality Product utilizing Reverse Engineering and Direct Digital Manufacturing Technology <i>Ismet P. Ilyas</i>	35
7	Multi-cultural Technology or Product Development through the Iterative Analysis and Synthesis of Technology Components <i>Iris Ann G. Martinez</i>	41
8	Multi Product Supply Chain Network Design Model <i>Nur Mayke Eka Normasari, Huynh Trung Luong</i>	49
9	Pick and Place Algorithm for Online Waste Removal Process in LOM <i>Kampanat Auyson, Pisut Koomsap, and Martinus Bagus Wicaksono</i>	56

10	Relationship Analysis of Product Innovation and Creativity of Marketing Programs to Sales Performance (Case Study in Furniture MSMEs of Jepara) <i>Bambang Purwanggono, Dyah Ika Rinawati, Lininda Nugrahaputri</i>	63
11	RCM Applications in Different Industries : A Comparative Study <i>Rahayu Khasanah, Siti Zawiah Md. Dawal, Jamasri, Hideki Aoyama</i>	69
12	Simple Design, Durable Design or Both? Environmentally Sustainable Design for Office Chair <i>Catharina Badra Nawangpalupi, Andri Oktavianus</i>	73
13	Strategy Development Of Local Based Design And Manufacturing For Better Enviroment. Case study: Construction Industry in Indonesia <i>Marcus Gartiwa</i>	81
14	Sustainable Manufacturing: A Framework of Cultural Aspects for Sustainable Product Design <i>Ihwan Ghazali, Salwa Hanim Abdul Rashid, Siti Zawiah Md Dawal, Alva Edy Tontowi, Hideki Aoyama</i>	89
15	Teaching Aircraft Design With Flyable Prototype <i>Sallehuddin Muhamad, Nurul Huda Ahmad</i>	96
16	The Application of the Anders Model on the Product Development Efforts of Garut Dodol Industry <i>Paulus Sukapto</i>	101
17	The Influence of Innovation on The Competitiveness of The SMEs (Case Study in Silver SMEs of Kotagede Yogyakarta) <i>Bambang Purwanggono, Dyah Ika Rinawati, Agatha Rachel</i>	108
18	The Product Design Evaluation of Elementary School Furniture <i>Lu'lu' Purwaningrum, Mulyadi, Silfia Mona Aryani, Yasierly</i>	118
19	Using the Value Stream Mapping and Overall Equipment Effectiveness to Improve Productivity: A Literature Review <i>Nguyen Truong Son, Salwa Hanim Abdul Rashid, Masaru Nakano</i>	123

Cluster 2: Manufacturing Engineering

1	Analysis of Cutting and Sintering Process of Polymer Materials Using Low Power Laser Diode <i>Ario Sunar Baskoro, Gandjar Kiswanto, Herwandi</i>	133
2	Automated Fish Scaling Machine <i>Christian Angelo R. De Jesus, Aimee U. Jumangit, Mark Kevin B. Ko, Chris John T. Lizarondo, Romeo P. Patawaran Jr., Marlon M. Musngi</i>	139
3	Automatic Welding Path Planning based on Detected Seam by Machine Vision <i>Gandjar Kiswanto, Albertus Rianto S</i>	144

4	Design and Manufacture of Magneto-Rheological Directional Control Valve <i>Zahurin Samad, Maher Yahya Salloom</i>	150
5	Design of Automatic Online Alignment for Multi-Color Flat Screen Printing <i>Martinus Bagus Wicaksono, PisutKoomsap, Risdiyono, Monthon Nakpathom</i>	158
6	Determining the Pose of a Robot End-Effector in Work-Space Using Unit Quaternions <i>Yin Yin Tun</i>	165
7	Development and Manufacturing of a Measurement Apparatus for NC Machine Tools Diagnosis by Double Ball Bar Method <i>Tri Prakosa, Nasril, Yatna Yuwana, Indra Nurhadi</i>	175
8	Development of Active Vibration Control Cancellation Pad for Orbital Sander <i>Zaidi Mohd Ripin, Ahmad Zhafran Ahmad Mazlan</i>	183
9	Effect of Geometrical Shapes on Stress Intensity Factors of the Cracked Plates under Nonlinear Geometric Deformation <i>Judha Purbolaksono, Tatacipta Dirgantara, Ferri M.H. Aliabadi</i>	190
10	EHD behaviour of the Different Bodies of a Connecting-rod Big end Bearing <i>Thi Thanh Hai Tran, Thami Zeghloul, Dominique Bonneau</i>	195
11	Grinding of Soda Lime Glass on CNC Milling in Manufacturing Complicated Special Products with Less Edge Chipping for Silicon Industry Application <i>Ahmed A. D. Sarhan, M.Sayuti, M.Hamdi</i>	201
12	Investigation of Machined Surface in Micro-EDM Deep Drilling <i>Sar Sambo, M. Hamdi, Kimiyuki Mitsui</i>	206
13	Mesoscopy: A New Approach for Industrial In-line Inspection <i>Ari Ide-Ektessabi, Jay Arre Toque and Yusuke Murayama</i>	211
14	Neutron Activation Analysis of Some Myanmar Traditional Medicine Formulations <i>Hnin Hnin Than and Myint U</i>	217
15	Novel Methods for Machining of Curved Surfaces <i>Hideki Aoyama, Kosuke Saito, Tatsuya Hokkyo</i>	222
16	Optimization of Gorlov Turbine Placement in Array Position to Maintain its Power Performance <i>Carolus Bintoro, Vicky Wuwung, Andriana Setiady</i>	230
17	Pilot study on handle design for Taiwanese <i>Nan-Yao Lee, Dengchuan Cai</i>	235
18	Portable-Electrical Discharge Machining (EDM) Processes of Zn, Al and Cu plate by Brass Tool Electrode <i>Muslim Mahardika, Andi Sudiarso, Ahmad Syaifuddin, Herdi Prima T, Pramudita Ulul A, Rizka Trisy A, Gunawan Setia Prihandana</i>	240

- | | | |
|----|---|-----|
| 19 | Preliminary Design of Conventional Mini Lathe Machine
<i>Suhendrianto, Iqbal Haris, Handoko, Muslim Mahardika, Gunawan Setia Prihandana, Marjanu Priambodo</i> | 243 |
| 20 | Tin Ball Casting Machine Design with 40 Cavities Capacity for Small and Medium Enterprises
<i>Eka Maulana, Agri. S, Wina. L</i> | 247 |

Cluster 3: Optimization

- | | | |
|---|--|-----|
| 1 | Applying The Probability Method To Determine Position Errors And Reliability Of The Position Errors Of Planar Mechanisms
<i>Nguyen Huu Loc, Nguyen Phi Trung</i> | 257 |
| 2 | Multidisciplinary Design Optimization (MDO) for Designing The Vessel Truck Using Augmented Lagrange Multiplier Method.
<i>Yuwono Budi Pratiknyo</i> | 263 |
| 3 | Optimization of Industrial Washing Machine Cleaning Parameters Using Digital Image Processing
<i>Edwin J. Calilung</i> | 269 |
| 4 | Optimization of Machining Parameters in CNC Milling Using Genetic Algorithm
<i>Cucuk Nur Rosyidi, Romi Fidiyanto, Ilham Priadythama</i> | 281 |
| 5 | Study on Dry and Mist Cutting in Ball-end Milling Process by Utilizing Response Surface Analysis and Box-Behnken Design
<i>Somkiat Tangjitsitcharoen, Angsuamlin Senjuntichai</i> | 286 |

Cluster 4: Energy

- | | | |
|---|--|-----|
| 1 | A Study into the Selection of Mono- and Multi-Hull Vessel for Better Sea Transportation System
<i>I K A P Utama, Jamaluddin, R.M. Hutauruk</i> | 297 |
| 2 | Analysis of the Pressure Fluctuations during the Steam Condensation in a Horizontal Annulus Pipe
<i>Sukamta, Indarto, Purnomo, Tri Agung Rohmat</i> | 305 |
| 4 | Design of Domestic Solar Water Heater
<i>Cho Min Han, Than Than Htike, Ma Nyo Lae Yee Swe</i> | 313 |
| 5 | Design Study Of Solar Power As Power Energy In North Sumatra Province
<i>Suwarno, I. Daut, M. Irwanto</i> | 320 |
| 6 | Numerical Modeling of Flows around Cylinders with Different Anti-VIV Devices
<i>Tran Quyet Thang, Tuan Mohammad Yusoff Shah Bin Tuan Ya, Nguyen Huu Loc, Shinnosuke Obi</i> | 326 |

- 7 The Experimental Work on Charging-discharging of A Solid Hydrogen Storage Tank 333
Hadi Suwarno

Cluster 5: Materials Engineering

- 1 Characteristics of Bionanocomposite From Tapioca Starch 339
Nuryetti, Heri Hermansyah, and M. Nasikin
- 2 Electrical Characteristics CuFe_2O_4 Thick Film Ceramics with Thickness Variation 344
 Fired at 1000°C for Negative Thermal Coefficient (NTC) Thermistor
Wiendartun, Dani Gustaman Syarif
- 3 Electrochemical Corrosion Behavior of 304 Stainless Steel in Nanofluid Contain 349
 nanopartikel ZrO_2 at Different Concentration
Djoko Hadi Prajitno, Dani Gustaman Syarif
- 4 Powder suspended dielectric fluid with application of workpiece vibration in μ -EDM 354
Gunawan Setia Prihandana, Yuta Prihandana, Kei Prihandana, Tutik Sriani, Muslim Mahardika
- 5 Preparation and Characterization of Bovine Hydroxyapatite Porous Bone Graft 358
Muhammad Kusumawan Herliansyah, Suyitno, Punto Dewo
- 6 Sloshing Free Portable Live Fish Container Using Natural Fiber Reinforced Composite 364
Sunaryo, Gerry Liston Putra, Ari Purwanto Nugroho
- 7 Syntesis and Surface Treatment of Co-Cr-Mo Alloys for Advanced Implant 370
 Biomaterial
B.Bandriyana, Sulistioso GS
- 8 Synthesis of ZrO_2 Nanopowder for Nanofluid 375
Dani Gustaman Syarif
- 9 The Effects of PANI Addition on the Manufacture of Carbon Composite Bipolar Plate 378
 for PEMFC Influenced by Utilizing Graphite Waste Products
Yunita Sadeli, Johny Wahyuadi Soedarsono, Sri Harjanto, Bambang Prihandoko
- 10 The Effect Of Sandblasting On AISI 316l Stainless Steels 383
Muh Iqbal M and Dicky Prasetya, Muslim Mahardika, Suyitno, Budi Arifvianto, Gunawan Setia Prihandana, P. Dewo
- 11 The Thermal Behavior of Bovine Hydroxyapatite: Effect of Calcination Temperature 387
 on the Morphology and Phase Purity of Bovine Hydroxyapatite Bone Graft for Biomedical Application
Muhammad Kusumawan Herliansyah, Suyitno, M.W. Wildan, P. Dewo, M. Hamdi, A. Ide-Ektesabi



The 4th International Conference
on Product Design & Development

In conjunction with

**The 4th AUN/SEED-Net
Regional Conference on Manufacturing**

Production Engineering



UNIVERSITAS
GADJAH MADA



In collaboration with

AUN/SEED-Net



Pick and Place Algorithm for Online Waste Removal Process in LOM

Kampanat Auyson, Pisut Koomsap, and Martinus Bagus Wicaksono

Industrial and Manufacturing Engineering Asian Institute of Technology, Pathumthani, THAILAND

Abstract: One significant issue in rapid prototyping using Laminated Object Manufacturing (LOM) is its difficulty to fabricate a prototype having hollow and shell-shaped part due to internal waste material removal. Even though waste material is crosshatched to small pieces for ease to remove, the traditional offline waste material removal remains very difficult and may damage the prototype. To make this well known sheet-based RP technique appropriate for objects that have cavity inside, online waste material removal process has been researched and has led to the development of another LOM technique that creates internal and external profiles separately at different locations. Presented in this paper is an algorithm for online inner waste removal process where the waste is removed right after the internal profile is cut and before the sheet is bonded onto the previous layer. According to the shape and size of waste area, the algorithm will make a recommendation either to a material removal unit regarding a location to pick up the waste material or to a cutting unit to subdivide the area before recommending the material removal unit to take them away. The algorithm has been tested with some samples and the results are reported also in this paper.

Keywords: LOM, de-cubing, RP, sheet deflection.

1 INTRODUCTION

Laminated Object Manufacturing (LOM) is a well known rapid prototyping technology that constructs a prototype layer by layer from sheet material, mainly paper. For each layer creation, a fresh sheet from a roll of paper is fed onto the fabrication platform that is lowered down, and bonded on top of the previous layer with heated roller that activates thermoplastic adhesive underneath the paper as it travel across the platform. A contour is then cut with laser beam as illustrated in Figure 1 or a cutting tool for an inexpensive LOM. Waste material is left in place as support structure but is diced to small tiles for ease of de-cubing. The bond-then-cut process is repeated until the topmost layer is constructed.

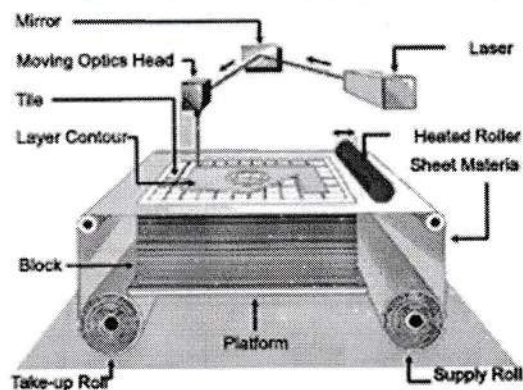


Figure 1. Laminated Object Manufacturing

LOM is a cost effective rapid prototyping technology with a variety of applications. It has been applied in several fields, such as architecture (Ryder et al., 2002), foundry (Mueller et al., 1999), etc. LOM technology gave a 50 percent saving in time and cost compared to aluminum pattern making (Wang et al., 1999). LOM has also been reported on Die Making for Diesel Engine (Yu et al., 2009). Besides its applications, researchers have tried to improve LOM technology for ease of producing object with curve. A new algorithm that combines the flat layer and curved layer has been introduced to eliminate stair step effect, increase build speed, and reduce waste when constructing a prototype (Klosterman et al., 1999). Sheet materials used in LOM have been extended to sheets of ceramics, polymers as well as metal.

However, LOM technology has many drawbacks. Cross hatching is time consuming. It consumes much more time comparing to contour cutting. Even though waste material is diced to small pieces, de-cubing process is still laborious because excess adhesive material infiltrates gaps during bonding any two layers. A prototype can also be easily damaged. Furthermore, LOM is limited to solid model construction. Some parts that are hollow, have vase-shape or have thin wall are hardly constructed by regular LOM due to the inner waste material removal (Liao et al., 2003).

For allowing these parts to be constructed on LOM, the inner waste materials should be removed online during the construction process. This paper presents

the development of an algorithm for online inner waste material removal that is executed right after the internal profile is cut and before the sheet is bonded onto the previous layer. Next section will report a couple researches on online inner waste material removal. The proposed algorithm is presented in the third section, followed by the implementation and conclusion.

2 RELATED WORKS

A couple approaches have been reported for solving the limitation of LOM when it is applied for constructing parts that are hollow and have shell shape. Liao et al (2003) has proposed an online de-cubing process, which allows inner waste material to be removed during the process. Bond-then-cut remains the principle applied in this proposed approach but instead of using paper coated underneath with thermoplastic adhesive, paper with self-adhesive is chosen. Similar to the traditional LOM, the fresh paper is fed into the process and bonded with the previous layer that its adhesive side is exposed to the air by a pressing force. Shielding paper that covered the adhesive side is peeled off from the new layer before contour cutting is made. Carbon powder is then sprayed on the waste material region that makes the area become non-adhesive. Inner waste material is removed by recovering the cut layer with shielding paper, pressing it and peeling it. The process is illustrated in Figure 2.

Bridge-LOM is another approach (Chiu et al., 2003). The process follows the principle of "cut-then-bond" instead of "bond-then-cut". Layer contours are created at one platform and stacked up on top of the previous layers at another platform. The contours are separated from waste material after cutting. Frame structure is introduced and bridges are created to link cut contours with the frame and between themselves for ease of handling between two platforms. The new layer is

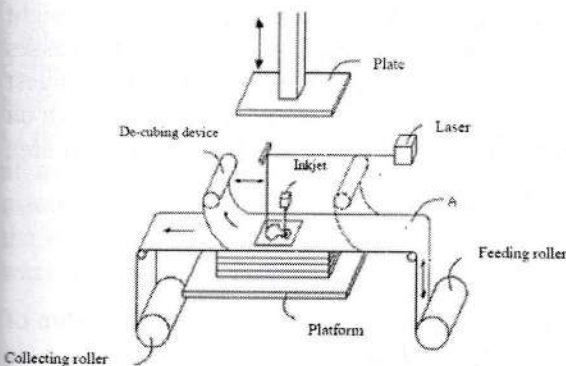


Figure 2. "Press and peel" LOM (Liao et al., 2003)

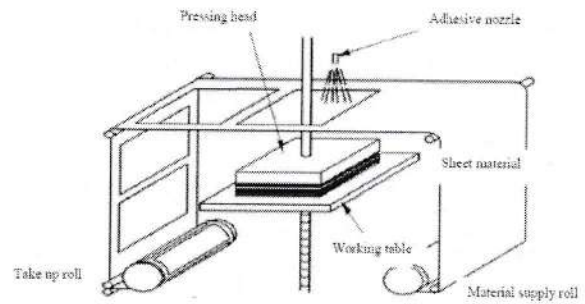


Figure 3. Bridge-LOM equipment (Chiu et al., 2003)

placed on top of the previous one that has already been pre-coated with adhesive material, and pressed. Feed-cut-press and spray are repeated for forming a 3D prototype. The process is illustrated in Figure 3.

3 ALGORITHM DEVELOPMENT

Similar to bridge-LOM, cut-then-bond principle has been applied in this research for creation of a prototype that has a cavity inside, but instead of using bridges, interior surface and exterior surface are created at different platforms. Unless it is a solid layer, a sheet material will be delivered onto the first platform for internal contour cutting before being transferred to the second platform for stacking up on the work-in-process prototype and for external contour cutting. At the first platform, after the internal contour is cut, inner waste material is removed from the platform by using one single removal unit as illustrated in Figure 4. Thus, it is required that the removal unit can lift up the waste sheet and removed it without dragging the sheet that remains attached on the platform.

Due to the flexible nature of a sheet and arbitrary shapes of waste material, a concern is more on sheet deflection causing the waste sheet to be in contact with the platform after lifting up. This requires the waste material to be cut to smaller pieces and more traveling time for the removal unit. An algorithm, therefore, is developed to determine whether or not the waste material can be lifted up above the platform and removed within one trip. It will recommend

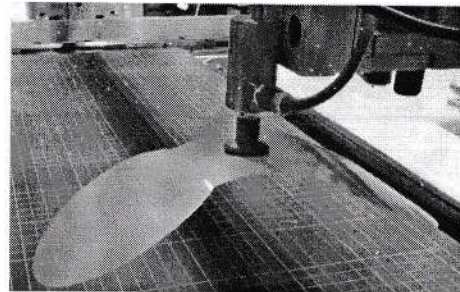


Figure 4. Waste material removal unit

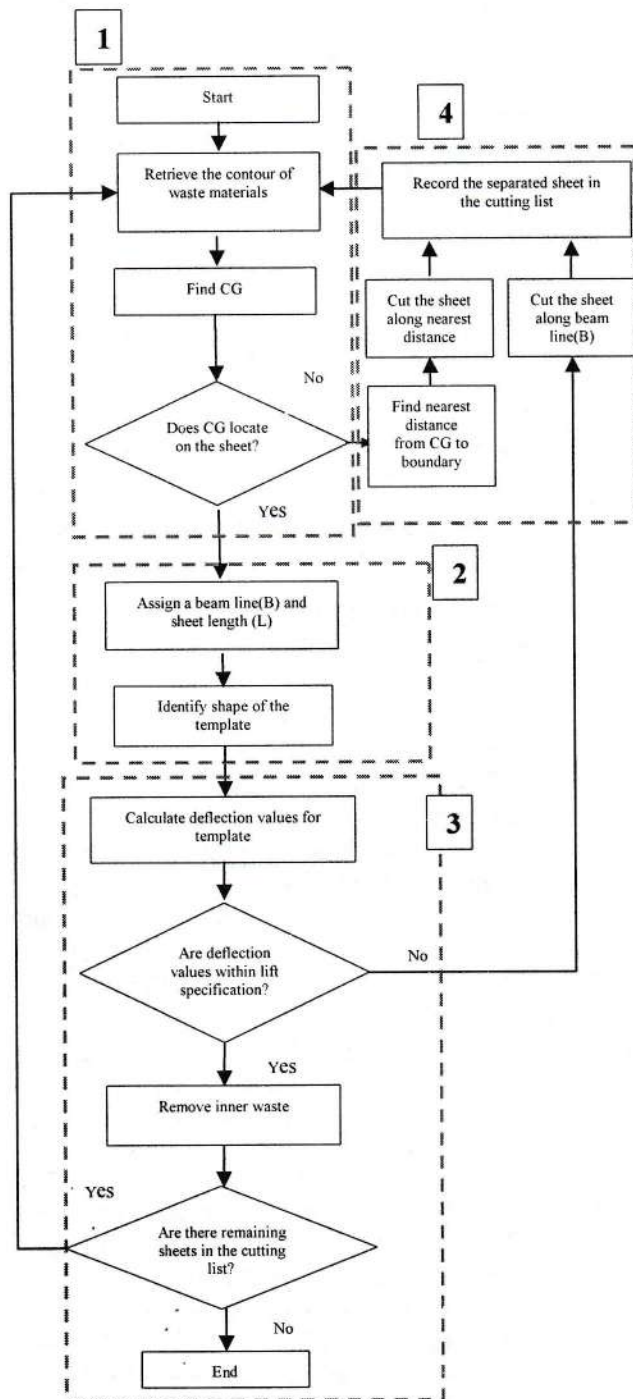


Figure 5. Flow chart of the proposed algorithm.

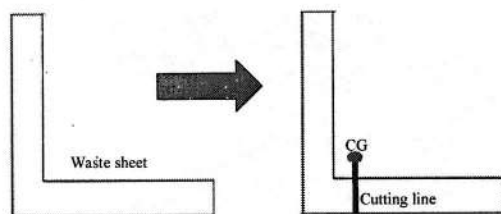


Figure 6. The cut line when the CG is outside the sheet

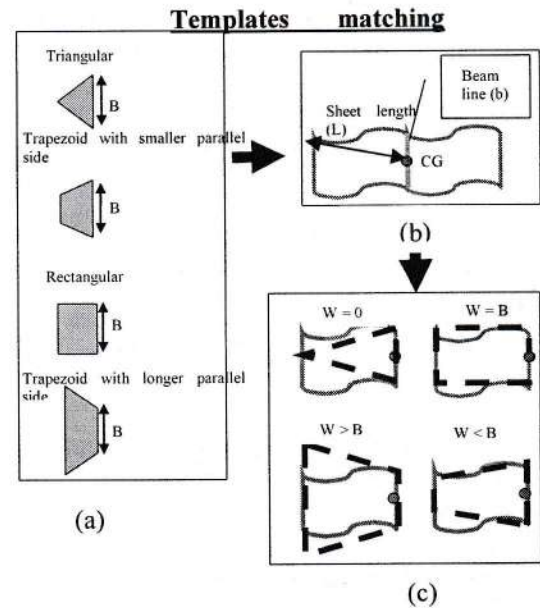


Figure 7. Template identification a). Template shapes b). Beam line and sheet length c). Template is selected according to W value

slicing the waste material if the waste material cannot clear the ground. As illustrated in Figure 5, the algorithm composes of four activities: identifying the location of the center of gravity (CG) on the waste area; identifying template; estimating sheet deflection from the template and cutting waste sheet to smaller pieces. The algorithm starts with identifying the CG of the first contour in the list of waste material. If the CG where the removal unit will lift the sheet locates outside the contour, the waste material is cut along the line that gives the shortest distance from CG to the contour as illustrated in Figure 6. The two new waste sheets are recorded in the list of waste material. The next one in the list is then called.

The parameters to be considered when selecting a template include beam line (B), sheet length (L) and area (A) as Figure 7. Beam line is the shortest straight line that connects two points on contour and passes through the CG. Sheet length is defined as the longest straight line from the CG to the contour. The length on the parallel side to the beam line (W) for known area can be determined from equation 1

$$W = \frac{2A}{L} - B \quad (1)$$

The template can be chosen according to the value of W. In case that W is zero, a triangular shape is selected. In case that W is greater than zero but smaller than beam line, a trapezoid shape with larger

base is selected. Rectangular and trapezoid with smaller base are selected when W is equal to and greater than beam line respectively.

After the template is identified, its sheet deflection is estimated. The estimation follows the deflection of a solid beam that one of its ends is fixed and that is deflected by uniform load of its own weight. The deflection formula is described in equation 2

$$Y = \frac{3QL^4}{2EBt^3} \quad (2)$$

where Y = deflection value, Q = force per length, E = Young modulus and t = thickness of the beam.

According to the formula, the deflection is proportional to the force, and the function of the length. It is also proportional to the reciprocal of young modulus, beam line length and thickness of sheet. However, the material used may be non-homogeneous and the Young modulus of a sheet becomes unknown. Furthermore, the formula is for uniform cross section but the waste material has arbitrary shape. Therefore, the equation is modified and put in 2 generic forms as described in equations 3 and 4. Equation 3 will be applied for rectangular shape that the cross sections are uniform throughout the length. The power (a) of the length and Young modulus are assumed to be unknown and will be identified from experiment by using linear regression. The obtained Young modulus will be used in equation 4 that the coefficient k is introduced to handle the non-uniform cross sections of triangular and trapezoidal shapes. The power (a) of the length and the coefficient k will be identified from experiment for these templates. Please note that \bar{Q} in equation 4 is the forces per area.

$$Y = \frac{3QL^a}{2EBt^3} \quad (3)$$

$$Y = \frac{3k\bar{Q}L^a}{2EBt^3} \quad (4)$$

From the estimation of sheet deflection, if the deflection is smaller than the lifting height, the algorithm sends a command to move the removal unit to the position to pick up and drop the waste material at assigned location. On the other hand, the waste material is cut along the beam line and recorded into the list. The algorithm completes the process after all waste materials are removed.

4 IMPLEMENTATION

The material used in this study was polypropylene (PP), and experiments were conducted to determine the unknown parameters which are the powers of





Table 1. Parameter setups for identifying the power of the length and Young modulus for all templates

Template shape	B(cm)	L(cm)	Number of data
Triangular	6	10-19	10
Trapezoid(W<B)	6	10-19	10
Rectangular	6	10-19	10
Trapezoid(W>B)	6	10-19	10

Table 2. The result from the experiments and regress model analysis for each template

Templates	Y(cm)	R ²	Slope	Intercept
Triangular	3-14	0.967	2.582	ln(-2.13)
Trapezoid(W<B)	4-16	0.991	2.0267	ln(-2.15)
Rectangular	6-16	0.996	1.59	ln(25.7)
Trapezoid(W>B)	6.5-17	0.981	1.704	ln(-2.71)

Table 3. Deflection equation of each template


Templates	Deflection equation
Triangular 	$Y = \frac{(0.263)3QL^{2.582}}{2EBt^3} ; E = 149415970272\text{Pa}$
Trapezoid 	$Y = \frac{(0.115)3QL^{2.0267}}{2EBt^3} ; E = 149415970272\text{ Pa}$
rectangular 	$Y = \frac{3QL^{1.59}}{2EBt^3} ; E = 149415970272\text{Pa}$
Trapezoid 	$Y = \frac{(0.07)3QL^{1.704}}{2EBt^3} ; E = 149415970272\text{ Pa}$

length, Young modulus and coefficient k for the four templates. In the experiment, sheet materials were cut


for all templates according to the parameters presented in Table 1. All the cut sheets had beam line of 6 cm while the lengths were varied at equidistance of 1 cm from 10 to 19 cm. The removal unit was directed to lift up these sheets one by one at their CG positions. The lifting height was 20 cm. The deflections were then measured and recorded.

Ten data were obtained from the experiment for each template. Linear regression was applied to identify the unknown parameters. Beginning with rectangular template, the power of the length and Young modulus were determined first from the slope and intercept of linear regression of Equation 3. The power of length and coefficient k for each of other templates were determined next from the slope and intercept of linear regression of Equation 4. The results from all templates are presented in Table 2. According to the high R-squared values in all cases, linear equations can be used to represent the data. The deflection formulae for all templates are presented in Table 3. The estimated and measured deflections are presented in Figure 8. According to the comparison, the errors are within 10%.


The algorithm has been tested with several shapes of waste material, and some of them are presented in Figures 9-11. The results show that the deviations of estimated deflections from their actual values are within 10%. In fact all the values are overestimated which give some cushion. The overestimation prevents the waste material to drag on the sheet when a decision to pick up a waste material is made.

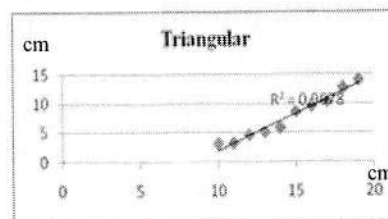


(a)

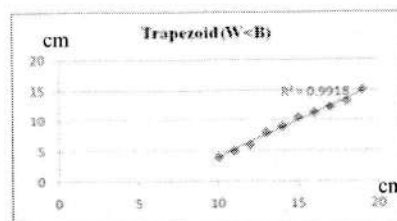

(b)

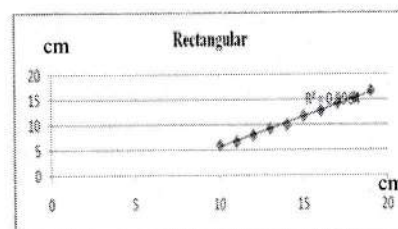

(c)

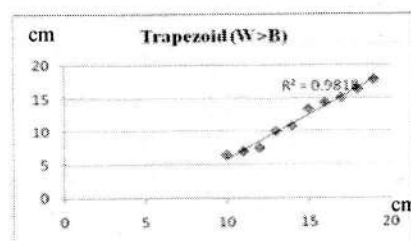

(d)

Figure 8. The comparison between the length (X axis) and measured deflections (Y axis) for the four templates

5 CONCLUSION

An algorithm has been developed for online waste material removal. According to the shape and size of waste area, the algorithm will make a recommendation either to a material removal unit to pick up the waste material or to a cutting unit to subdivide the area before recommending the material removal unit to take them away. Sheet deflection which is a key decision making criterion is estimated from primitive shape templates instead of being

calculated according to its shape that may be arbitrary. The experiments have given promising results. The errors from the overestimation are within 10%.









Input	Model 1	Model 2
Steps		
Identifying CG and beam line		
	A = 2545380, B = 6873.6, L = 7339.58	A = 2327400, B = 10496, L = 8394
Sheet cutting in case CG out of contour	Unit =pixels	Unit =pixels
	None	None
Identify shape template of	 	 
	W>B; W = 6998.474	W=0
Calculate deflection values for template	5.6 cm	4.8 cm
Sheet cutting in case CG out of lift specification (20 cm)	None	None
Actual deflection	5.5 cm	4.8cm

Figure 9. The implementation of the algorithm on Model 1 and 2







Input	Model 3	Model 4
Steps		
Identifying CG and beam line		
	A = 190903, B = 6873.6, L = 7339.58	A = 2202860, B = 10496, L = 8394
Sheet cutting in case CG out of contour	Unit =pixels	Unit =pixels
	None	None
Identify shape template of	 	 
	W<B; W = 4782	W<B; W = 9279
Calculate deflection values for template	5.7 cm	12 cm
Sheet cutting in case CG out of lift specification (20 cm)	None	None
Actual deflection	5 cm	11 cm

Figure 10. The implementation of the algorithm on Model 3 and 4








Input	Model 5
Steps	
Identifying CG and beam line	 $A = 1100430, B = 4050, L = 14670$ Unit = pixels
Sheet cutting in case CG out of contour	None
Identify shape of template	<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">  $W=0$  $W<B$  $W=B$  $W>B$ </div> <div>  Trapezoid template $W<B, W = 450.73$ </div> </div>
Calculate deflection values for template	17.5 cm
Sheet cutting in case CG out of lift specification (20 cm)	None
Actual deflection	17 cm

Figure 11. The implementation of the algorithm on Model 5

References

- Chiu, Y.Y., Liao, Y.S., and Hou, C.C. (2003). "Automatic fabrication for bridged laminated object manufacturing (LOM) process." *Journal of Materials Processing Technology* 140, 179–184.
- Klosterman, D.A. et al. (1999). "Development of a curved layer LOM process for monolithic ceramics and ceramic matrix composites." *Rapid Prototyping Journal*, 5(2), 61–71.
- Liao, Y.S., Chiu, L.C., and Chiu, Y.Y. (2003). "A new approach of online waste removal process for laminated object manufacturing (LOM)." *Journal of Materials Processing Technology*, 140, 136–140.
- Mueller, B., and Kochan, D. (1999). "Laminated object manufacturing for rapid tooling and patternmaking in foundry industry." *Computers in Industry* 39, 47–53.
- Ryder, G., Ion, B., Green, G., Harrison, D., and Wood, B. (2002). "Rapid design and manufacture tools in architecture." *Automation in Construction*, 11, 279–290.
- Wang, W., Conley, J.G., and Stoll, H.W. (1999). "Rapid tooling for sand casting using LOM process." *Rapid Prototyping Journal*, 5(3), 134–140.
- ZHANG, Y., and LIU, H. (2009). "Application of rapid prototyping technology in die making of diesel engine." *Tsinghua Science and Technology*, 14 (S1), 127–131.