



Source details

Journal of Robotics and Control (JRC)

Scopus coverage years: from 2020 to Present
Publisher: Department of Electrical Engineering, Universitas Muhammadiyah Yogyakarta
ISSN: 2715-5056 E-ISSN: 2715-5072
Subject area: Engineering: Control and Systems Engineering Computer Science: Artificial Intelligence
Source type: Journal

[View all documents >](#) [Set document alert](#) [Save to source list](#) [Source Homepage](#)

CiteScore 2022 ⓘ
4.7

SJR 2022 ⓘ
0.376

SNIP 2022 ⓘ
1.153

[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

Improved CiteScore methodology

CiteScore 2022 counts the citations received in 2019-2022 to articles, reviews, conference papers, book chapters and data papers published in 2019-2022, and divides this by the number of publications published in 2019-2022. [Learn more >](#)

CiteScore 2022 ▼

4.7

=

1,076 Citations 2019 - 2022

231 Documents 2019 - 2022

Calculated on 05 May, 2023

CiteScoreTracker 2023 ⓘ

5.7

=

1,584 Citations to date

278 Documents to date

Last updated on 05 October, 2023 • Updated monthly

CiteScore rank 2022 ⓘ

Category	Rank	Percentile
Engineering		
Control and Systems Engineering	#95/286	66th
Computer Science		
Artificial Intelligence	#136/301	54th

[View CiteScore methodology >](#) [CiteScore FAQ >](#) [Add CiteScore to your site](#)

SJR

SI

SR

CR

G

Scimago Journal & Co

Enter Journal Title, ISSN or Publisher Name

Q

Home

Journal Rankings

Country Rankings

Viz Tools

Help

About Us

←

Ads by Google

Stop seeing this ad

Why this ad? ⓘ

Journal of Robotics and Control (JRC)

<div>COUNTRY</div> <div>Indonesia</div> <div> <div> Universities and research institutions in Indonesia </div> <div> Media Ranking in Indonesia </div> </div>	<div>SUBJECT AREA AND CATEGORY</div> <div>Computer Science</div> <div> <div>└</div> Artificial Intelligence </div> <div>Engineering</div> <div> <div>└</div> Control and Systems Engineering </div>	<div>PUBLISHER</div> <div>Department of Electrical Engineering, Universitas Muhammadiyah Yogyakarta</div>	<div>H-INDEX</div> <div>14</div>
<div>PUBLICATION TYPE</div> <div>Journals</div>	<div>ISSN</div> <div>27155056, 27155072</div>	<div>COVERAGE</div> <div>2020-2022</div>	<div>INFORMATION</div> <div> Homepage </div> <div> How to publish in this journal </div> <div> jrcofumy@gmail.com </div>

Submit Paper Publication

International Widely Indexed Open / Scholarly Academic Research Journ

Open


SCOPE

The topic of published papers might be subjected to one or more of the following scopes: Autonomous robots Robotics modeling and design Embedded systems in robotics and control Information system engineering in Robotics and control Control systems Artificial intelligence in robotics and control


 Join the conversation about this journal

Quartiles


SJR

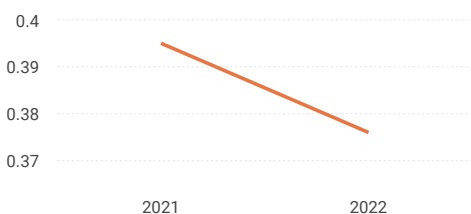


Total Documents

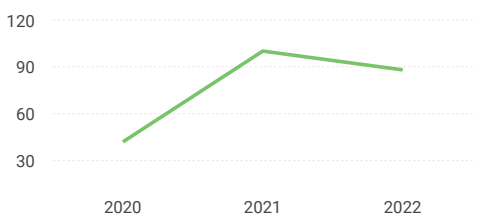


Total Cites Self-Cites

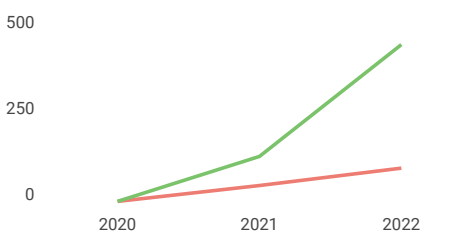

External Cites per Doc Cites per Doc

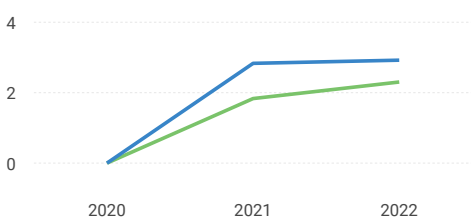

Citations per document


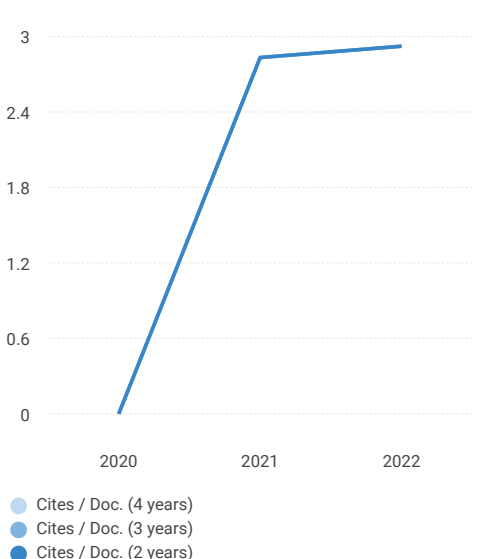


% International Collaboration



Citable documents Non-citable documents



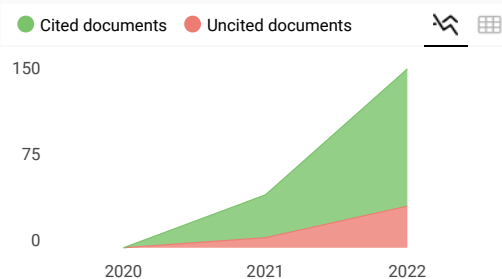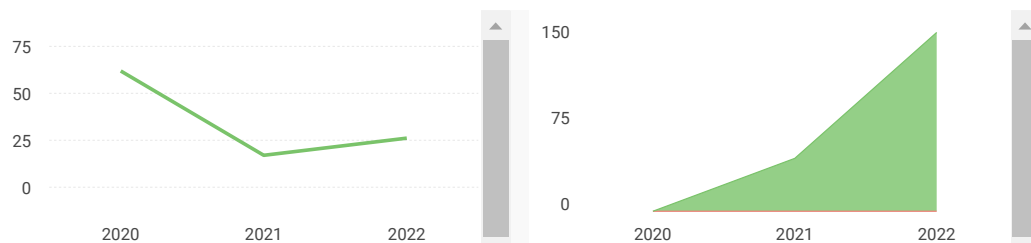

Journal of Robotics and Control (JRC)

Q3 Artificial Intelligence best quartile

SJR 2022 0.38

powered by scimagojr.com

← Show this widget in your own website

Just copy the code below and paste within your html code:

`<a href="https://www.scimag`

SCImago Graphica

Explore, visually communicate and make sense of data with our [new data visualization tool](#).

Metrics based on Scopus® data as of April 2023

Leave a comment

Name

Email

(will not be published)



I'm not a robot

reCAPTCHA
Privacy - Terms

Submit

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

Developed by:



Scimago

Powered by:

Scopus

Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2022. Data Source: Scopus®

EST MODUS IN REBUS

Horatio (Satire 1.1, 106)

[Cookie settings](#)

[Cookie policy](#)

Journal of Robotics and Control (JRC)

P-ISSN: 2715-5056 | E-ISSN: 2715-5072

<https://journal.umy.ac.id/index.php/jrc>

Scopus
Indexed Journal

[Home](#) [About](#) [Login](#) [Register](#) [Categories](#) [Search](#) [Current](#) [Archives](#) [Announcements](#) [Indexing](#) [Youtube Channel](#) [Journal Partners](#)

[Home](#) > [About the Journal](#) > [Editorial Team](#)

Editorial Team

Associate Editor

[Prof. Dr. Quanxin Zhu](#), (SCOPUS ID: 8689808100 || WOS ID: 1723963), Hunan Normal University, China
[Prof. Dr. Magdi Sadek Mahmoud](#), (SCOPUS ID: 7202058424 || WOS ID: 1588414), King Fahd University of Petroleum & Minerals, Saudi Arabia
[Prof. Dr. Ning Wang](#), (SCOPUS ID: 55871122684 || WOS ID: 1821774), Dalian Maritime University, China
[Prof. Dr. Mohd Fua'ad Rahmat](#), (SCOPUS ID: 6507102340), Universiti Teknologi Malaysia, Malaysia
[Assist. Prof. Jamshed Iqbal](#), (SCOPUS ID: 57212516960 || WOS: 1596613), University of Hull, United Kingdom

Editor-in-Chief

[Asst. Prof. Dr. Ir. Iswanto - Iswanto](#), (SCOPUS ID : 56596730700), Universitas Muhammadiyah Yogyakarta, Indonesia

Managing Editor

[Alfian Ma'arif](#), (SCOPUS ID: 57195619646 || WOS ID: N-7401-2019), Peneliti Teknologi Teknik Indonesia, Indonesia

Editorial Board Member 1

[Dr. Wahyu Rahmانيar](#), Tokyo Institute of Technology, Japan

Editorial Board Member 2

[Prof. Dr. V. D. Ambeth Kumar](#), (SCOPUS ID: 37100924000), Panimalar Engineering College, India
[Prof. Dr. Joel Perez Padron](#), (SCOPUS ID: 57193135327), Universidad Autónoma de Nuevo León, Mexico
[Prof. Dr. Eduard Babulak](#), (SCOPUS ID: 57204798643), Liberty University, United States
[Prof. Dr. Tadaga Channaveerappa Manjunath](#), (SCOPUS ID: 8288457500), Dayananda Sagara College of Engineering, India
[Prof. Dr. Mohammad Salah](#), (SCOPUS ID: 16053198500), The Hashemite University, Jordan
[Assoc. Prof. Dr. Mohammad Rakib Uddin](#), (SCOPUS ID: 26029464200), Universiti Teknologi Brunei, Brunei Darussalam
[Assoc. Prof. Dr. Bibhya Sharma](#), (SCOPUS ID: 55423727000), The University of the South Pacific, Fiji
[Assoc. Prof. Dr. Oyas Wahyunggoro](#), (SCOPUS ID: 25825877400), Universitas Gadjah Mada, Indonesia
[Assoc. Prof. Dr. Arockia Selvakumar](#), (SCOPUS ID: 56962707900), Vellore Institute of Technology, India
[Assoc. Prof. Dr. Prashant Kumar Shukla](#), (SCOPUS ID: 57190738806), K. L. Deemed to be University, Vaddeswaram, Vijayawada, Andhra Pradesh, India
[Asst. Prof. Dr. Alper Bayrak](#), (SCOPUS ID: 35174276300), Abant İzzet Baysal Üniversitesi, Turkey
[Dr. Mahmut Dirik](#), (SCOPUS ID: 55566619400), Sırnak University, Turkey
[Dr. Angelo A. Beltran Jr.](#), (SCOPUS ID: 57190953123), Adamson University, Philippines
[Dr. Hendri Himawan Triharminto](#), (SCOPUS ID: 55005961300), Indonesian Airforce Academy, Indonesia
[Dr. Ayman Al-khazraji](#), (SCOPUS ID: 36600062800), University of Bahrain, Bahrain
[Dr. Guna sekaran](#), (SCOPUS ID: 57196512300), Shibaura Institute of Technology, Japan
[Dr. Suzi Iryanti Fadilah](#), (SCOPUS ID: 56177217200), Universiti Sains Malaysia, Malaysia
[Dr. Bashir Olaniyi Sadiq](#), (SCOPUS ID: 57194234226), Ahmadu Bello University Zaria, Nigeria
[Dr. Ahmed Tijjani Salawudeen](#), (SCOPUS ID: 57194240461), Ahmadu Bello University Zaria, Nigeria
[Dr. Almido Haryanto Ginting](#), (SCOPUS ID: 57211315644), Universitas Nusa Cendana, Indonesia
[Asst. Prof. Debabrata Samanta](#), (SCOPUS ID: 52264517700), CHRIST, India
[Dr. Dhinakaran V](#), (SCOPUS ID: 57192396623), Chennai Institute of Technology, India
[Dr. Adha Imam Cahyadi](#), (SCOPUS ID: 16549109100), Universitas Gadjah Mada, Indonesia
[Dr. Syed Ali Thiruvalluvar](#), (SCOPUS ID: 24345328500), University Tamil Nadu, India
[Dr. Elsayed T. Helmy](#), (SCOPUS ID: 57208135418), National Institute of oceanography and fisheries, Alexandria, Egypt

[Editorial Team](#)

[Reviewer](#)

[Author Guidelines](#)

[Focus and Scope](#)

[Publications Ethics](#)

[Open Access Policy](#)

[Peer Review Process](#)

[Online Submission](#)

[Publication Charge \(Fee\)](#)

[Visitor Statistics](#)

[Contact](#)

Journal of Robotics and
Control (JRC)



USER

Username
Password
☐ Remember me

ARTICLE TEMPLATE

- ▶ [Ms. Word \(DOCX\)](#)
- ▶ [Latex \(TEX\)](#)

NOTIFICATIONS

- ▶ [View](#)
- ▶ [Subscribe](#)

JOURNAL CONTENT

Search
Search Scope

Browse

- [By Issue](#)
- [By Author](#)
- [By Title](#)
- [Other Journals](#)
- [Categories](#)

KEYWORDS

[Adaptive Control](#) [Arduino](#)
[Arduino Uno](#) [Artificial](#)
[Intelligence](#) [Artificial](#)
[Intelligence](#) [Control](#) [DC](#)
[Motor](#) [Genetic](#) [Algorithm](#)
[Internet](#) [of](#) [Things](#)
[IoT](#) [Machine](#) [Learning](#)
[Mobile](#) [Robot](#) [PID](#) [PID](#)
[Control](#) [PID](#) [Controller](#)
[PID](#) [control](#) [Path](#) [Planning](#).
[Robot](#) [Robotic](#) [UAV](#)
[microcontroller](#)

VISITOR STATS

221471

[View JRC Stats](#)


www.freevisitorcounters.com

Visitor Counter

Today	185
Yesterday	387
All	18775
Online	16

VISITOR COUNTRY

Visitors

 39,219	 2,582
 15,775	 2,484
 14,213	 2,409
 10,541	 2,285
 4,997	 2,229
 3,880	 2,143
 3,627	 2,019
 3,406	 1,943
 2,829	 1,883
 2,625	 1,647

Pageviews: 403,129



Journal of Robotics and Control (JRC)

P-ISSN: 2715-5056 | E-ISSN: 2715-5072

<https://journal.umy.ac.id/index.php/jrc>

Scopus
Indexed Journal

[Home](#) [About](#) [Login](#) [Register](#) [Categories](#) [Search](#) [Current](#) [Archives](#) [Announcements](#) [Indexing](#) [Youtube Channel](#) [Journal Partners](#)

[Home](#) > [Archives](#) > **Vol 2, No 4 (2021)**

Vol 2, No 4 (2021)

























July

DOI: <https://doi.org/10.18196/jrc.v2i4>

The author's countries are coming from Indonesia, Tunisia, India, Philippines, Nigeria, Taiwan, Afghanistan, China.

Table of Contents

Articles

An hybridization of global-local methods for autonomous mobile robot navigation in partially-known environments  Samia Sahloul, Donia BEN HALIMA Abid, Chokri REKIK	221-233	
Online Digital Image Stabilization for an Unmanned Aerial Vehicle (UAV)  Wahyu Rahmانيar, Amalia Eka Rakhmania	234-239	
Automatic Floor Cleaning Robot Using Arduino and Ultrasonic Sensor  Yuda Irawan, Muhardi Muhardi, Rian Ordila, Roni Diandra	240-243	
IR Based Auto-Recharging System for Autonomous Mobile Robot  M.V.Sreenivas Rao, M. Shivakumar	244-251	
Low Power NAND Gate-based Half and Full Adder / Subtractor Using CMOS Technique  Angelo A. Beltran Jr., Kristina Nones, Reina Louise Salanguit, Jay Bhie Santos, Jose Maria Rei Santos, Keith Joseph Dizon	252-257	
Optimized Harmonic Reduction PWM based Control Technique for Three-Phase quasi Z-Source Inverter  Pritam Kumar Gayen, Archak Sadhukhan	258-264	
Water Level Control Monitoring Based On Arduino Uno R3 Atmega 238p Using Lm016I LCD at STMIK Hang Tuah Pekanbaru  Refni Wahyuni, Jeri Trio Sentana, Muhardi Muhardi, Yuda Irawan	265-269	
The Design of Electro Cardiograph Signal Generator Using IC 14521 and IC 14017  Nur Hudha Wijaya, Wahidun Arif Rijali, Nishith Shahu, Irfan Ahmad, Rachmad Andri Atmoko	270-273	
Proposing Utilization of Photovoltaic (PV) Source into Power Distribution Network Using University of Port Harcourt as a Case Study  Omorogiuwa Eseosa, Noel Iloayira Wariboko	274-282	
Morse Code Receiver On Invisible Light Using Background Subtraction Method  Yuda Irawan, Refni Wahyuni, Herianto Herianto	283-286	
Detector Leakage Gas Lpg Based On Telegram Notification Using Wemos D1 and Mq-6 Sensor  Uci Rahmalisa, Anita Febriani, Yuda Irawan	287-291	
Mixing and controlling the pH of citrate and phosphate with website  Syahrul Syahrul, Ilham Komarujaman	292-296	

[Editorial Team](#)

[Reviewer](#)

[Author Guidelines](#)

[Focus and Scope](#)

[Publications Ethics](#)

[Open Access Policy](#)

[Peer Review Process](#)

[Online Submission](#)

[Publication Charge \(Fee\)](#)

[Visitor Statistics](#)

[Contact](#)

Journal of Robotics and Control (JRC)



USER

Username
Password
☐ Remember me
[Login](#)

ARTICLE TEMPLATE

- [► Ms. Word \(DOCX\)](#)
- [► Latex \(TEX\)](#)

NOTIFICATIONS

- [► View](#)
- [► Subscribe](#)

JOURNAL CONTENT

Search
Search Scope
[Search](#)

Communication Systems of Smart Agriculture Based on Wireless Sensor Networks in IoT  <i>Ardian Prima Atmaja, Aulia El Hakim, Ari Purnomo Aji Wibowo, Lasardi Abdi Pratama</i>	297-301 
Design of Multisensor Automatic Fan Control System Using Sugeno Fuzzy Method  <i>Willy Robson, Iin Ernawati, Catur Nugrahaeni</i>	302-306 
Light Control Using Human Body Temperature Based on Arduino Uno and PIR (Passive Infrared Receiver) Sensor  <i>Reza Perkasa, Refni Wahyuni, Rika Melyanti, Herianto -, Yuda Irawan</i>	307-310 
Design of a Continuous Passive Motion (CPM) Machine for Wrist Joint Therapy  <i>Antonius Hendro Noviyanto, Laurentia Deby Septilianingtyas, Dita Rahmawati</i>	311-315 
Application for Selection of Student Final Project Supervisors Based on the Selected Category and Expertise of Lecturers Using the Naive Bayes Classifier Method  <i>Muhamad Ikhsanudin, Yuda Irawan</i>	316-321 
Wheeled Robot Design with Brain Wave Headset Control System  <i>Arif Wibisono</i>	322-327 
RSSI Indoor Outdoor Personal Localization: A Study to Found Targeted Social Engineering Victim by Attacker Via Wireless Methods  <i>Ahmad Firdausi, Galang P. N. Hakim</i>	328-331 
Proportional-Integral-Derivative and Linear Quadratic Regulator Control of Direct Current Motor Position using Multi-Turn Based on LabView  <i>Devi Handaya, Resti Fauziah</i>	332-336 

Journal of Robotics and Control (JRC)

P-ISSN: 2715-5056 || E-ISSN: 2715-5072

Organized by [Peneliti Teknologi Teknik Indonesia](#)

Published by [Universitas Muhammadiyah Yogyakarta](#) in collaboration with [Peneliti Teknologi Teknik Indonesia](#), Indonesia and the [Department of Electrical Engineering](#)

Website: <http://journal.umy.ac.id/index.php/jrc>

Email: jrcofumy@gmail.com

Browse

- [By Issue](#)
- [By Author](#)
- [By Title](#)
- [Other Journals](#)
- [Categories](#)

KEYWORDS

[Adaptive Control](#)
[Arduino](#)
[Arduino Uno](#)
[Artificial Intelligence](#)
[Artificial Intelligence Control](#)
[DC Motor](#)
[Genetic Algorithm](#)
[Internet of Things](#)
[IoT](#)
[Machine Learning](#)
[Mobile Robot](#)
[PID](#)
[PID Control](#)
[PID Controller](#)
[PID control](#)
[Path Planning](#)
[Robot](#)
[Robotic](#)
[UAV](#)
[microcontroller](#)

VISITOR STATS

221471

[View JRC Stats](#)

www.freevisitorcounters.com

Visitor Counter

Today	184
Yesterday	387
All	18774
Online	15

VISITOR COUNTRY

Visitors

	39,216		2,582
	15,775		2,484
	14,213		2,409
	10,541		2,285
	4,997		2,229
	3,880		2,143
	3,627		2,019
	3,406		1,943
	2,829		1,883
	2,625		1,647

Pageviews: 403,116

 **FLAG counter**

Design of a Continuous Passive Motion (CPM) Machine for Wrist Joint Therapy

Antonius Hendro Noviyanto¹, Laurentia Deby Septilianingtyas², Dita Rahmawati³

^{1, 2, 3} Department of Electromedical Engineering, Politeknik Mekatronika Sanata Dharma, Yogyakarta, Indonesia

Email: ¹ hendro@pmsd.ac.id, ² laurentia807@gmail.com, ³ rahmawatidita88@gmail.com

Abstract— Patients after joint surgery require passive movements that are carried out continuously. The movement is given to the patient to reduce the stiffness that occurs in the joints after joint surgery. Joint stiffness is characterized by pain and limited motion of the joint, which is caused due to reduced synovial fluid. Synovial fluid in the joints can be reduced if the joint is not moved in a long time. This research will design a wrist joint therapy machine that can be moved flexion, extension, ulnar and radial. Besides that, the device to be designed can be adjusted the angle of movement of the tool and the speed of movement of the tool. The angles of movement that can be reached are: (1) flexion movement: 80 ° movement angle, (2) extension movement: 75 ° movement angle, (3) radial movement: 25 ° movement angle, and (4) ulnar movement: movement angle 39 °. Adjustable speeds include: 1 RPM, 2 RPM and 3 RPM. In the result of testing device, we find the maximum difference of movement in 2° and the speed of rotation we have the difference in 0.5 second. Based on experiments that have been done, the tool can be controlled in accordance with the desired movement settings.

Keywords— CPM Machine, Wrist, Joint Stiffness, Rehabilitation, Microcontroller

I. INTRODUCTION (HEADING 1)

Continuous Passive Motion (CPM) Machine is a device that used for help patients to move the joints [1][2][3][4][5]. Passive and continuous movements which generated by CPM Machine can help out patient after joint surgery during doing the rehabilitation to restore joint movement [5][6][7].

Patient post joint surgery or post joint trauma, require long rest and make minor movement in the joint. Minor movement in the joint can be helped by a device that can moved passively and continuously. Thus, with passive and continuous movement can restore joint limitations or joint stiffness in patient post joint surgery [8][9][10][11].

Joint stiffness can be marked with pain in the joint and limitation movement on the joint. Joint stiffness can be caused by joint capsule adhesions with cartilage in the surrounding joint. Joint adhesions caused by occurrence of decline synovial fluids around the joint [12]. Synovial fluids are the liquid which used to lubricant on the joint. Decreased synovial fluids on the joint are caused by the joint didn't be move after joint surgery.

Joint stiffness in patient post joint surgery can be prevented by providing movement exercise that can restore limitation movement on the joint [13][14]. These exercise can be done by providing passive and repetitive movements. Passive movements are movements that do not require

muscle work. Movements exercise can be done using CPM Machine. In accordance with its working principle, CPM Machine can move the joints passively and continuously. Besides that, movements exercise with CPM machine can reduce bleeding that occurs and increase synovial fluid on around the joint [15]. Using CPM machine has the following benefits [16]:

- 1) Increases nutrition and metabolic activity on the surface of cartilage.
- 2) Stimulates mesenchymal cells into differentiation in the surface of cartilage.
- 3) Increases recuperation of cartilage and periarticular tissue, such as tendons and ligaments.

The scope of motion from the wrist joint are flexion, extension, ulnar (adduction), radial (abduction) and circular movements [17][18]. Weight of adult human hands can be calculated 0.7% of the total weight of the human body [19].

In other research [13], has conducted research on the CPM Machine which is used to perform therapy in the shoulder joint. Where the tool is also used to support the arm and help to move passively and continuously. The torque requirement of the tool affects the performance of the tool.

In other research [20][21], has conducted research on therapeutic tools that can be used to perform passive therapy and active therapy on the hands. In this study, a therapy device that is driven by a DC motor is designed.

In other research [22], has conducted research on rehabilitation equipment using pneumatic parallel manipulator. This tool is developed using pneumatic technology, which utilizes compressed air and features a parallel manipulator that is used for movement of the human wrist joint.

In other research [23], this paper focuses on robots for wrist rehabilitation designed to provide three degrees of rotational freedom: abduction–adduction; flexion–extension; pronation–supination.

There are many other studies that develop rehabilitation equipment [24][25], of these tools are mostly used for rehabilitation of the upper limb and have a large size.

In this study, we will discuss design of the CPM Machine therapy that can be used for wrist therapy. Where the movement of the tool will be controlled using a microcontroller. The microcontroller in this tool will control



the movement of the stepper motor which functions as a source of movement for the wrist. The movements that will be carried out in this design include [23][26][27][28]:

- 1) Flexion movement with a maximum angle of motion of 80 °,
- 2) Extensions movement with a maximum angle of movement of 75 °,
- 3) Radial movement with a maximum angle of movement of 25 °, and
- 4) Ulnar movement with a maximum angle of motion of 39 ° at the wrist joint.

The limit of the person's body weight to be used as the limit for calculating the torque from the hand is 80 kg and length is 20 cm.

The results of designing the CPM Machine for the wrist joint will be presented in four parts. First, the research will present the needs and benefits of the CPM Machine therapy device. Second, this research will describe the stages in the design of the CPM Machine therapy device, such as the calculation of the required torque and the calculation of the conversion from the rotary encoder sensor to the angle of the device. Third, this study will discuss and analyze the test results from the design of the CPM Machine therapy device. The test will be carried out 3 times, so that the accuracy of the designed tools will be known. Fourth, this study will provide a discussion and conclusions from the results of the design of the CPM Machine therapy device that has been carried out.

II. METHODS

In this research using the ATmega328 Microcontroller as controller of the system and use the Nema 23 stepper motor as a drive for the wrist joint. In the device that designed using the Nextion NX4024T032 LCD for the interface between user and device, and also as an information viewer of the device.

The use of the Nema 23 stepper motor on this research is based on the torque requirements of the requirements used to move the wrist. To control the Nema 23 stepper in this design using micro stepping controllers. Micro stepping can be used to increase the resolution of the stepper motor used [29]. The torque from the hand can be calculated with the following equation [30]:

$$\tau = m \times g \times \frac{1}{2}l \quad (1)$$

where :

τ = torque (Nm)

W = force (N)

l = lenght (m)

m = mass (kg)

g = acceleration of gravity (m/s²)

So, that it can be seen the torque from the hand is as follows:

$$\tau = m \times g \times \frac{1}{2}l$$

$$\tau = \frac{0.7}{100} \times 80 \times 10 \times \frac{1}{2} \times 0.2$$

$$\tau = 0.56 \text{ Nm}$$

Based on the desired needs, then designed a device that can meet for wrist therapy. Box from the device will be made from acrylic with the design as in following figure 1:


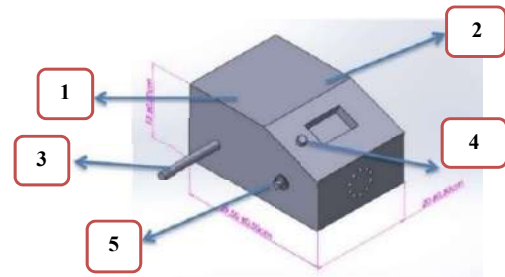


Fig 1. Tool Box Design


TABLE 1. DESCRIPTION OF TOOL BOX PARTS

No.	Part	Description
1.	Box	As a place for the main and supporting components
2.	LCD Touchscreen	As a tool interface
3.	Arm Support	As a support arm during therapy
4.	Emergency	To stop the therapy process when there is a disturbance
5.	Motor Shaft	As a connector between the motor and the wrist mount

In a device equipped with a hand support that is used to support the hand during therapy, the design of the hand support is as shown in Figure 2.

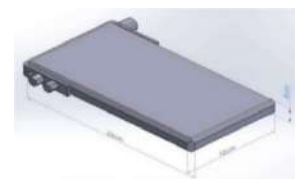

(a)



(b)

Fig 2(a). Flexion-Extension Movement Hand Support and 2(b). Ulnar-Radial Movement Hand Support

The system designed on the tool will be controlled by a microcontroller. The microcontroller will receive input from the limit switch which is used to indicate the maximum position, minimum position, and middle position of the tool movement. Besides receiving input from the limit switch, the microcontroller also receives input from the LCD in the form of determining the type of movement, the angle of movement, and the speed of the therapy movement. There is also a rotary encoder sensor which is used to determine the angle of movement of the tool. The output signal of microcontroller

will used the motor driver to drive the stepper motor [31]. Block diagram of the tool as in Figure 3.

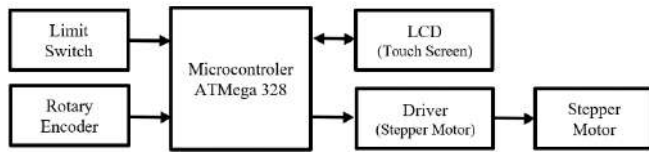


Fig 3. Blog Diagram of System

The calculation of the conversion of the signal generated by the rotary encoder sensor into the amount of rotation angle can be done with the following equation 2:

$$\text{angle} = \frac{x}{n} \times 360^\circ \quad (2)$$

where:

x = The number of pulses required by the rotary encoder for one turn

n = the number of pulses generated by the rotary encoder

The test method used in this research is to test 3 times and make comparisons with existing measuring instruments. The test is carried out at the angle of movement of the tool and at the rotational speed of the tool. Testing the angle of movement of the tool is done by comparing the results of the angle reading by the microcontroller with the angle reading from the protractor. Testing of the rotational speed of the tool is done by comparing the length of play time of the tool being tested using a timer by a stop watch

III. RESULTS AND TESTING

In accordance with the design that has been carried out in this study, it produces hardware tools as in Figure 4 below.



Fig 4. Generated Tool

Tests carried out on this tool are carried out on testing the angle of movement of the tool and testing the movement speed of the tool. The test is carried out according to the method described in the second part of this study.

A. Testing Tool Movement Angle

Testing the angle of movement of the tool is carried out three times, the results of the first test are recorded in table 2, the second test results are recorded in table 3, and the third test results are recorded in table 4.

TABLE 2. TEST RESULTS 1 ANGLE OF THE TOOL MOVEMENT

Angle Specified (in degrees)	Experiment 1	
	Motor Pulse Calculation	Motor Angle Readout (in degrees)
0	0	0
5	44	5
10	89	9

15	133	14
20	178	18
25	222	24
30	267	30
35	311	35
40	356	39
45	400	45
50	444	50

In table 2, we test the hardware about angle of movement. We measure the angle from 0° to 50° . From the result of motor pulse, we can find the angle with equation (2). Based on the results of the first test shown in table 2, there is a difference of 2° when measuring 20° .

TABLE 3. TEST RESULTS 2 ANGLE OF THE TOOL MOVEMENT

Angle Specified (in degrees)	Experiment 2	
	Motor Pulse Calculation	Motor Angle Readout (in degrees)
0	0	0
5	44	4
10	89	9
15	133	15
20	178	19
25	222	25
30	267	29
35	311	34
40	356	40
45	400	45
50	444	49

In table 3, same with table 2, we test the hardware about angle of movement. We measure the angle from 0° to 50° . From the result of motor pulse, we can find the angle with equation (2). Based on the results of the second test shown in table 3, there is a difference in the angle of 1° .

TABLE 4. TEST RESULTS 3 ANGLE OF THE TOOL MOVEMENT

Angle Specified (in degrees)	Experiment 3	
	Motor Pulse Calculation	Motor Angle Readout (in degrees)
0	0	0
5	44	4
10	89	9
15	133	14
20	178	19
25	222	25
30	267	29
35	311	35
40	356	40
45	400	45
50	444	50

In table 4, same with table 2 and table 3, we test the hardware about angle of movement. We measure the angle from 0° to 50° . From the result of motor pulse, we can find the angle with equation (2). Based on the results of the third test shown in table 4, there is a difference in the angle of 1° .

Based on the data from the test results, the angle of movement of the tool is obtained that corresponds to the angle of movement needed for the tool. From table 2, the angle of movement has a maximum difference of 2° .

B. Testing of Tool Movement Speed

The motion speed test of the tool is done by measuring the length of time the tool moves. Time calculation is done using a stop watch tool. Tests carried out three times data collection. The test steps are carried out as follows:

- 1) *The 1 RPM test is done by measuring the length of time one full rotation of the instrument being tested.*
- 2) *The 2 RPM test is done by measuring the length of time two full turns of the instrument being tested.*
- 3) *The 3 RPM test is done by measuring the length of time three times the full rotation of the instrument being tested.*

Based on the tests that have been done, the results are as in table 5.

TABLE 5. RESULTS OF THE TESTING SPEED OF THE TOOL

RPM	Experiment 1	Experiment 2	Experiment 3
1	59.50	59.56	59.58
2	59.58	59.56	59.57
3	59.80	59.50	59.30

Based on the results of the tests that have been carried out, it can be seen that the results are close to the predetermined needs. The need for 1 RPM in experiments I, II, and III, it was found that the movement time in one rotation was 59.5 seconds. Needs of 2 RPM in experiments I, II, and III, it was found that the movement time in one rotation was 59.5 seconds. Needs of 3 RPM in experiments I, II, and III obtained the duration of movement in three rotations is 59.5 seconds.

IV. DISCUSSION AND CONCLUSION

Joint therapy is an activity used to increase the range of motion of the joints after joint surgery. Patients after joint surgery will feel pain in moving the joints, this results in patients experiencing joint stiffness due to reduced synovial fluid in the joints.

Joint stiffness can be reduced by performing passive, continuous light motion exercises on the joints. This motion exercise aims to increase the range of motion of the joints. Motion exercises can be performed according to the range of motion of the joints experiencing stiffness.

Passive and continuous light motion exercises can be assisted by a Continuous Passive Motion Machine therapy device. The CPM Machine tool in this study can be used with the desired motion settings, such as: the desired range of motion, the desired angle of motion, and the desired speed of movement.

In general, the data generated from the tests that have been carried out are in the conditions that are desired. The tool can work according to the selection of the desired joint range of motion, the desired angle of motion, and the desired speed of movement.

REFERENCES

- [1] Mujianto, Cara Cepat Mengatasi 10 Besar Kasus Muskuloskeletal dalam Praktik Klinik Fisioterapi. Jakarta: CV. Trans Info Media, 2013.
- [2] M. K. Saputra and A. A. Iskandar, "Development of automatic continuous passive motion therapeutic system," Proc. - Int. Conf. Instrumentation, Commun. Inf. Technol. Biomed. Eng. 2011, ICICI-BME 2011, no. November, pp. 376–379, 2011.
- [3] Y. Fu, F. Zhang, S. Wang, and Q. Meng, "Development of an embedded control platform of a continuous passive motion machine," IEEE Int. Conf. Intell. Robot. Syst., pp. 1617–1622, 2006.
- [4] W. K. Song and J. Y. Song, "Improvement of upper extremity rehabilitation Robotic Exoskeleton, NREX," 2017 14th Int. Conf. Ubiquitous Robot. Ambient Intell. URAI 2017, pp. 580–582, 2017.
- [5] J. C. Gose, "Continuous passive motion in the postoperative treatment of patients with total knee replacement. A retrospective study," Phys. Ther., vol. 67, no. 1, pp. 39–42, 1987.
- [6] B. J., Surgical Anatomy of the Shoulder and Neck Region. Philadelphia: W.B. Saunders Co, 1972.
- [7] H. N. Rasyid, R. M. Tati, S. Soegijoka, and J. T. Pramudito, "Design and realization of personal computer-based continuous passive motion device to prevent shoulder joint stiffness," pp. 573–576, 2004.
- [8] S. Uetsuji, N. Kingsuvangul, B. Boonyasurakul, and W. Charoensuk, "Hand exoskeleton for continuous passive motion postoperative rehabilitation," BMEiCON 2017 - 10th Biomed. Eng. Int. Conf., vol. 2017-Janua, pp. 1–5, 2017.
- [9] S. Dubey et al., "Semi-automatic continuous passive motion physiotherapeutic device for post stroke patients," Proc. Int. Conf. Circuits, Commun. Control Comput. I4C 2014, no. November, pp. 169–172, 2014.
- [10] M. Tagami and Y. Tagawa, "Development of a continuous-passive-motion device with an active training mode for muscle recovery," 2017 Asian Control Conf. ASCC 2017, vol. 2018-Janua, no. Dialin 732, pp. 2226–2231, 2018.
- [11] N. Hogan et al., "Motions or muscles? Some behavioral factors underlying robotic assistance of motor recovery," J. Rehabil. Res. Dev., vol. 43, no. 5, pp. 605–618, 2006.
- [12] S. W. O'Driscoll and N. J. Giori, "Department of Veterans Affairs Continuous passive motion (CPM): Theory and principles of clinical application," J. Rehabil. Res. Dev., vol. 37, no. 2, pp. 179–188, 2000.
- [13] S. Miyaguchi, K. Nojiri, N. Matsunaga, and S. Kawaji, "On effective movement in CPM for shoulder joint," in Conference Proceedings - IEEE International Conference on Systems, Man and Cybernetics, 2008, pp. 530–534.
- [14] S. Miyaguchi, N. Matsunaga, K. Nojiri, and S. Kawaji, "Impedance control of CPM device with flex-/extension and pro-/supination of upper limbs," in IEEE/ASME International Conference on Advanced Intelligent Mechatronics, AIM, 2007.
- [15] K. Nojiri, N. Matsunaga, and S. Kawaji, "Inverse Kinematics Analysis," Int. Conf. Mechatronics, no. May, pp. 8–10, 2007.
- [16] Selter R., Continuous Passive Motion (CPM): Textbook of Disorders and Injuries of the Musculoskeletal System. USA: Lippincott Williams & Wilkins, 1999.
- [17] J. Hamill and K. M. Knutzen, Biomechanical Basis of Human Movement, 3rd ed. Lippincott Williams & Wilkins, 2009.
- [18] Y. J. W. Clauser C. E., McConville J. T., Weight, Volume, And Center Of Mass Of Segments Of The Human Body. Virginia: National Technical Information Service, Springfield, 1969.
- [19] D. C. Giancoli, Physics Principles with Applications, 6th ed. United States of America: Pearson Education Inc., 2015.
- [20] B. Birch, E. Haslam, I. Heerah, N. Dechev, and E. J. Park, "Design of a continuous passive and active motion device for hand rehabilitation," in Proceedings of the 30th Annual International Conference of the IEEE Engineering in Medicine and Biology Society, EMBS'08 - "Personalized Healthcare through Technology," 2008, pp. 4306–4309.
- [21] J. Li, R. Zheng, Y. Zhang, and J. Yao, "iHandRehab: An interactive hand exoskeleton for active and passive rehabilitation," IEEE Int. Conf. Rehabil. Robot., no. 50975009, 2011.

- [22] M. Takaiwa and T. Noritsugu, "Development of wrist rehabilitation equipment using pneumatic parallel manipulator," *Proc. - IEEE Int. Conf. Robot. Autom.*, vol. 2005, no. April, pp. 2302–2307, 2005.
- [23] H. I. Krebs et al., "Robot-aided neurorehabilitation: A robot for wrist rehabilitation," *IEEE Trans. Neural Syst. Rehabil. Eng.*, vol. 15, no. 3, pp. 327–335, 2007.
- [24] T. Faculty and B. Co, "Application of Rubber Artificial Muscle Manipulator," pp. 112–117, 1996.
- [25] K. Koyanagi, J. Furusho, U. Ryu, and A. Inoue, "Development of rehabilitation system for the upper limbs in a NEDO project," *Proc. - IEEE Int. Conf. Robot. Autom.*, vol. 3, pp. 4016–4022, 2003.
- [26] V. Squeri, L. Masia, L. Taverna, and P. Morasso, "Improving the ROM of wrist movements in stroke patients by means of a haptic wrist robot," *Proc. Annu. Int. Conf. IEEE Eng. Med. Biol. Soc. EMBS*, pp. 1268–1271, 2011.
- [27] A. Erwin, M. K. O'Malley, D. Ress, and F. Sergi, "Kinesthetic Feedback during 2DOF Wrist Movements via a Novel MR-Compatible Robot," *IEEE Trans. Neural Syst. Rehabil. Eng.*, vol. 25, no. 9, pp. 1489–1499, 2017.
- [28] R. Colombo et al., "Robotic techniques for upper limb evaluation and rehabilitation of stroke patients," *IEEE Trans. Neural Syst. Rehabil. Eng.*, vol. 13, no. 3, pp. 311–324, 2005.
- [29] W. Kim, D. Shin, and C. C. Chung, "Microstepping with nonlinear torque modulation for permanent magnet stepper motors," *IEEE Trans. Control Syst. Technol.*, vol. 21, no. 5, pp. 1971–1979, 2013.
- [30] C. C. Norkin and D. J. White, *Measurement of Joint Motion: A Guide to Goniometry*, Third Edition. F.A. Davis, 2009.
- [31] S. Dorin-Mirel, I. Lita, and M. Oproescu, "Comparative analysis of stepper motors in open loop and closed loop used in nuclear engineering," *2017 IEEE 23rd Int. Symp. Des. Technol. Electron. Packag. SIITME 2017 - Proc.*, vol. 2018-Janua, pp. 357–360, 2017.