

ISSN: 2088-6578

CITEE2012

**Yogyakarta, Indonesia
July 12, 2012**

**PROCEEDINGS OF
INTERNATIONAL CONFERENCE ON
INFORMATION TECHNOLOGY
AND
ELECTRICAL ENGINEERING**



DEPARTMENT OF ELECTRICAL ENGINEERING
AND INFORMATION TECHNOLOGY
FACULTY OF ENGINEERING
GADJAH MADA UNIVERSITY



ORGANIZER 2012

Technical Program Committee

- Andreas Timm-Giell (Universität Hamburg-Harburg Germany)
- Ryuichi Shimada (Tokyo Institute of Technology, Japan)
- Ismail Khalil Ibrahim (Johannes Kepler University Linz, Austria)
- Kang Hyun Jo (University of Ulsan, Korea)
- David Lopez (King's College London, United Kingdom)
- Martin Klepal (Cork Institute of Technology, Ireland)
- Tamotsu Nimomiya (Nagasaki University, Japan)
- Ekachai Leelarasmee (Chulalongkorn University, Thailand)
- Marteen Weyn (Artesis University College, Belgium)
- Chong Shen (Hainan University, China)
- Haruichi Kanaya (Kyushu University, Japan)
- Ramesh K. Pokharel (Kyushu University, Japan)
- Ruibing Dong (Kyushu University, Japan)
- Kentaro Fukushima (CRIEPI, Japan)
- Mahmoud A. Abdelghany (Minia University, Egypt)
- Sunil Singh (G B Pant University of Agriculture & Technology, India)
- Abhishek Tomar (G B Pant University of Agriculture & Technology, India)
- Lukito Edi Nugroho (Universitas Gadjah Mada, Indonesia)
- Umar Khayam (Institut Teknologi Bandung, Indonesia)
- Anton Satria Prabuwono (Universiti Kebangsaan Malaysia, Malaysia)
- Eko Supriyanto (Universiti Teknologi Malaysia, Malaysia)
- Kamal Zuhairi Zamli (Universiti Sains Malaysia, Malaysia)
- Sohiful Anuar bin Zainol Murod (Universiti Malaysia Perlis, Malaysia)

Advisory Board

- F. Danang Wijaya
- Risanuri Hidayat

General Chair

- Widyanawan

Chair

- Eka Firmansyah
- Indriana Hidayah
- Eny Sukani Rahayu
- Avrin Nur Widyastuti
- Bimo Sunarfri Hantono

Chair (cont.)

- Sigit Basuki Wibowo
- Budi Setiyanto
- Ridi Ferdiana
- Yusuf Susilo Wijoyo
- Adhistya Erna Permanasari
- Prapto Nugroho
- Muhammad Nur Rizal
- Selo Sulistyono
- Sunu Wibirama
- Lilik Suyanti
- Indria Purnamasari

Reviewer

- Adhistya Erna Permanasari
- Agus Bejo
- Avrin Nur Widyastuti
- Bambang Sugiyantoro
- Bambang Sutopo
- Bimo Sunarfri Hantono
- Bondhan Winduratna
- Budi Setiyanto
- Danang Wijaya
- Eka Firmansyah
- Enas Duhri Kusuma
- Eny Sukani Rahayu
- Harry Prabowo
- Indriana Hidayah
- Insap Santosa
- Isnaeni
- Iswandi
- Litasari
- Lukito Edi Nugroho
- Noor Akhmad Setiawan
- Prapto Nugroho
- Ridi Ferdiana
- Risanuri Hidayat
- Rudy Hartanto
- Samiadji Herdjunanto
- Sarjiya
- Sasongko Pramono Hadi
- Selo
- Sigit Basuki Wibowo
- Silmi Fauziati
- Suharyanto
- Sujoko Sumaryono
- Sunu Wibirama
- T. Haryono
- Teguh Bharata Adji
- Wahyu Dewanto
- Wahyuni
- Warsun Nadjib
- Widyanawan
- Yusuf Susilo Wijoyo

FOREWORD

Welcome to this year's CITEE 2012 in Yogyakarta.

Peace be upon you. First of all, praise to Allah, for blessing us with healthy and ability to come here, in the Conference on Information Technology and Electrical Engineering 2012 (CITEE 2012). If there is some noticeable wisdoms and knowledge must come from Him.

This conference is the fourth annual conference organized by the Department of Electrical Engineering and Information Technology, Faculty of Engineering, Universitas Gadjah Mada. It is expected that CITEE 2012 can serve as a forum for sharing knowledge and advances in the field of Information Technology and Electrical Engineering, especially between academic and industry researchers.

On behalf of the committee members, I would like to say thank you to all of the writers, who come here enthusiastically to share experiences and knowledge. I also would like to say thank you to the keynote speakers for the participation and contribution in this conference.

According to our record, there are 150 papers from 15 countries are being submitted to this conference and after underwent reviewing process there are 78 papers that will be presented. It is a 52% acceptance rate. There are 15 papers in the field of Power Systems, 26 papers in the area of Signals System and Circuits, 11 papers in Communication System and 26 papers in Information Technology. Furthermore, the proceedings of this conference is expected to be used as reference for the academic and practitioner alike.

Finally, I would like to say thank you to all of the committee members, who worked tirelessly to prepare this conference. Special thank to IEEE Computer Society Indonesian Chapter, Department of Electrical Engineering and Information Technology UGM and LPPM UGM for the support, facility and funds.

Thank you and enjoy the conference, CITEE 2012, and the city, Yogyakarta

12 July 2012

Widyawan

Table of Contents

Inner Cover			i
Organizer			ii
Foreword			iii
Schedule			iv
Table of Contents			v
1.	I-ALG #11	Enabling Real-time Alert Correlation Using Complex Event Processing <i>Hichem Debbi, Bilal Lounnas, and Abdelhak Bentaleb</i>	1
2.	I-JPN #11	Detection and Verification of Potential Peat Fire Using Wireless Sensor Network and UAV <i>Rony Teguh, Toshihisa Honma, Aswin Usop, Heosin Shin, and Hajime Igarashi</i>	6
3.	I-IND #11	Data Mining Application to Reduce Dropout Rate of Engineering Students <i>Munindra Kumar Singh, Brijesh Kumar Bharadwaj, and Saurabh Pal</i>	11
4.	I-THA #11	Usability Standard and Mobile Phone Usage Investigation for the Elderly <i>V. Chongsuphajaisiddhi, V. Vanijja, and O. Chotchuang</i>	15
5.	I-Jkrt #11	Test on Interface Design and Usability of Indonesia Official Tourism Website <i>Anindito Yoga Pratama, Dea Adlina, Nadia Rahmah Al Mukarrohmah, Puji Sularsih, and Dewi Agushinta R.</i>	21
6.	I-Jkrt #12	Data Warehouse for Study Program Evaluation Reporting Based on Self Evaluation (EPSBED) using EPSBED Data Warehouse Model: Case Study Budi Luhur University <i>Indra, Yudho Giri Sucahyo, and Windarto</i>	25
7.	I-Bndg #11	Denial of Service Prediction with Fuzzy Logic and Intention Specification <i>Hariandi Maulid</i>	32
8.	I-Smrg #11	Integrating Feature-Based Document Summarization as Feature Reduction in Document Clustering <i>Catur Supriyanto, Abu Salam, and Abdul Syukur</i>	39
9.	I-Smrg #12	A GPGPU Approach to Accelerate Ant Swarm Optimization Rough Reducts (ASORR) Algorithm <i>Erika Devi Udayanti, Yun-Huoy Choo, Azah Kamilah Muda, and Fajar Agung Nugroho</i>	43
10.	I-Smrg #13	Loose-Coupled Push Synchronization Framework to Improve Data Availability in Mobile Database <i>Fahri Firdausillah, and Norhaziah Md. Salleh</i>	48
11.	I-Smrg #14	Feature Extraction on Offline Handwritten Signature using PCA and LDA for Verification System <i>Fajrian Nur Adnan, Erwin Hidayat, Ika Novita Dewi, and Azah Kamilah Muda</i>	53
12.	I-UGM #11	Cognitive Agent Based Modeling of a Question Answering System <i>Eka Karyawati, and Azhari SN</i>	58
13.	I-UGM #12	GamaCloud: The Development of Cluster and Grid Models based shared-memory and MPI <i>Mardhani Riassetiawan</i>	65
14.	I-TEIb #11	Sub-Trajectory Clustering for Refinement of a Robot Controller <i>Indriana Hidayah</i>	70
15.	I-TEIb #12	Transfer Rules Algorithm for Hierarchical Phrase-based English-Indonesian MT Using ADJ Technique <i>Teguh Bharata Adji</i>	74
16.	P-IRI #11	Investigation of Insulation Coordination in EHV Mixed Line <i>A.Eyni, and A.Gholami</i>	77

17.	P-IND #11	Unbalance and Harmonic Analysis in a 15-bus Network for Linear and Nonlinear Loads <i>T.Sridevi, and K.Ramesh Reddy</i>	82
18.	P-Bntn #11	The Maximizing of Electrical Energy Supply for Production of Steel Plant through Fault Current Limiter Implementation <i>Haryanta</i>	88
19.	P-Smrg #11	Modelling and Stability Analysis of Induction Motor Driven Ship Propulsion <i>Supari, Titik Nurhayati, Andi Kurniawan Nugroho, I Made Yulistya Negara, and Mochamad Ashari</i>	93
20.	P-Pwt #11	A New Five-Level Current-Source PWM Inverter for Grid Connected Photovoltaics <i>Suroso, Hari Prasetijo, Daru Tri Nugroho, and Toshihiko Noguchi</i>	98
21.	P-Pwt #12	Optimal Scheduling of Hybrid Renewable Generation System Using Mix Integer Linear Programming <i>Winasis, Sarjiya, and T Haryono</i>	104
22.	P-TEIa #11	Design and Implementation Human Machine Interface for Remote Monitoring of SCADA Connected Low-Cost Microhydro Power Plant <i>Alief Rakhman Mukhtar, Suharyanto, and Eka Firmansyah</i>	109
23.	P-TEIa #12	Equivalent Salt Deposit Density and Flashover Voltage of Epoxy Polysiloxane Polymeric Insulator Material with Rice Husk Ash Filler in Tropical Climate Area <i>Arif Jaya, Tumiran, Hamzah Berahim, and Rochmadi</i>	113
24.	P-TEIa #13	Tracking Index of Epoxy Resin Insulator <i>Abdul Syakur, Tumiran, Hamzah Berahim, and Rochmadi</i>	119
25.	S-IND #11	Semiconducting CNTFET Based Half Adder/Subtractor Using Reversible Gates <i>V.Saravanan, and V.Kannan</i>	124
26.	S-MAS #11	Preliminary Design for Teleoperation Systems under Nonholonomic Constraints <i>Adha I. Cahyadi, Rubiyah Yusof, Bambang Sutopo, Marzuki Khalid, and Yoshio Yamamoto</i>	129
27.	S-Jkrt #11	PACS Performance Analysis In Hospital Radiology Unit <i>Sugeng Riyadi, and Indra Riyanto</i>	134
28.	S-Srby #11	Middleware Framework of AUV using RT-CORBA <i>Nanang Syahroni, and Jae Weon Choi</i>	141
29.	S-Srby #12	Convolute Binary Weighted Based Frontal Face Feature Extraction for Robust Person's Identification <i>Bima Sena Bayu D., and Jun Miura</i>	147
30.	S-Srby #13	Evaluation of Speech Recognition Rate on Cochlear Implant <i>Nuryani, and Dhany Arifianto</i>	153
31.	S-Mlmg #11	Remote Laboratory Over the Internet for DC Motor Experiment <i>Aryuanto Soetedjo, Yusuf Ismail Nakhoda, and Ibrahim Ashari</i>	157
32.	S-Mlmg #12	Comparative Analysis of Neural Fuzzy and PI Controller for Speed Control of Three Phase Induction Motor <i>Ratna Ika Putri, Mila Fauziyah, and Agus Setiawan</i>	162
33.	S-Bndg #11	Programmable Potentiostat Based ATMEL Microcontroller for Biosensors Application <i>Erry Dwi Kurniawan, and Robeth V. Manurung</i>	168
34.	S-Bndg #12	Dummy State: An Improvement Model for Hybrid System <i>Sumadi, Kuspriyanto, and Iyas Munawar</i>	172

35.	S-Smrg #11	Fuzzy C-Means Algorithm for Adaptive Threshold on Alpha Matting <i>R. Suko Basuki, Moch. Hariadi, and R. Anggi Pramunendar</i>	177
36.	S-Smrg #12	Analysis of Performance Simulator Water Level Control at Fresh Water Tank in PLTU with Microcontroller <i>M Denny Surindra</i>	182
37.	S-Pwt #11	An FPGA Implementation of Automatic Censoring Algorithms for Radar Target Detection <i>Imron Rosyadi</i>	187
38.	S-Yog #11	On The Influence of Random Seeds Evaluation Range in Generating a Combination of Backpropagation Neural Networks <i>Linggo Sumarno</i>	195
39.	S-UGM #11	Analisis EEG Menggunakan Transformasi Fourier Waktu-singkat dan Wavelet Kontinu: Studi Kasus Pengaruh Bacaan al Quran <i>Agfianto Eko Putra, and Putrisia Hendra Ningrum Adiaty</i>	201
40.	C-EGY #11	Interference Mitigation for Self-Organized LTE-Femtocells Network <i>Nancy Daa El-Din, Karim G. Seddik, Ibrahim A. Ghaleb, and Essam A. Sourour</i>	211
41.	C-Jkrt #11	Dual-Band Antenna Notched Characteristic with Co-Planar Waveguide Fed <i>Rastanto Hadinegoro, Yuli Kurnia Ningsih, and Henry Chandra</i>	216
42.	C-Jkrt #12	Edge – Component Order Connectivity Issue In Designing MIMO Antennas <i>Antonius Suhartomo</i>	220
43.	C-Srby #11	Robust Image Transmission Using Co-operative LDPC Decoding Over AWGN Channels <i>M. Agus Zainuddin, and Yoedy Moegiharto</i>	226
44.	C-Srby #12	Parameter Measurement of Acoustic Propagation in the Shallow Water Environment <i>Tri Budi Santoso, Endang Widjiati, Wirawan, and Gamantyo Hendrantoro</i>	231
45.	C-Bndg #11	Radio Network Planning for DVB-T Repeater System Integrated with Early Warning System <i>Herry Imanta Sitepu, Dina Angela, Tunggul Arief Nugroho, and Sinung Suakanto</i>	235
46.	C-TEIa #11	Considering Power Consumption of Wireless Stations Based on 802.11 Mode Control <i>Ramadhan Praditya Putra, Sujoko Sumaryono, and Sri Suning Kusumawardani</i>	240
47.	C-TEIb #11	The Design Model of 2.4 GHz Dual Biquad Microstrip Antenna <i>Wahyu Dewanto, Penalar Arif, and HC. Yohannes</i>	245
48.	C-TEIb #12	Voice Service Performance of Broadband Cellular Systems <i>Wahyu Dewanto, and Imam Bagus Santoso</i>	252
49.	C-TEIb #13	Capacity and Quality of Single Cell WiMAX Network for VoIP Application <i>Budi Setiyanto, Esmining Mitarum, and Sigit Basuki Wibowo</i>	257

On The Influence of Random Seeds Evaluation Range in Generating a Combination of Backpropagation Neural Networks

Linggo Sumarno

Faculty of Science and Engineering
Sanata Dharma University, Yogyakarta 55282, Indonesia
Email: lingsum@dosen.usd.ac.id

Abstract—A classifier combination, which makes use of several backpropagation neural networks can be generated by using the same architecture but different weight sets. Those neural networks were generated by means of random seeds evaluation when they were trained. An experiment has been carried out by generating a number of backpropagation neural networks by means of random seeds evaluation. Based on the experiment it was shown that, in general, if the number of neural networks were getting bigger, the wider range of random seeds evaluation was needed. As a lower limit, a random seeds evaluation range 1 to 20 is needed, if 3 or 4 neural networks were chosen.

Keywords: classifiers combination, backpropagation neural network, random seed, evaluation range

I. INTRODUCTION

Before 1990, in pattern recognition studies, only one classifier was usually used to solve a classification problem. Since early 1990's, an idea emerged that in a pattern recognition not only one classifier but also several classifiers could be used together. In accordance with it, the idea to use the classifier combination methods has been expanding. The research domain of the classifiers combination methods examine how several classifiers can be applied together in order to obtain the better classification systems. It was shown that the classifier combination methods might improve the recognition performance in difficult pattern recognition problems [1], [2]. The classifier combination methods may also be used to increase the speed of the systems [3], [4] or to reduce the time taken for the design of classification system [5].

In the classifier combination methods, there are two issues need to be considered. The first one is how the classifiers are generated, and the second one is how they are combined. Sumarno [6] has addressed the first issue, i.e. how a combination of classifiers which made use of backpropagation neural networks are generated by means of random seeds evaluation. In this paper, it will be discussed further by exploring the influence of random seeds evaluation range in generating a combination of backpropagation neural networks.

II. THEORY

A. Classifier Combination

In order to improve the performance of pattern recognition applications, classifier combination methods have proved to be an effective tool. In terms of classifier combination members, theoretical research by Hansen and Salomon [7] and also Krogh and Vedelsby [8], as well as empirical research by Hashem [9] and Optiz [10] have demonstrated that the best combination is combination of several different classifiers. There were no advantages in combining several identical classifiers.

In order to generate several different classifiers, it can be carried out by only based on a base classifier. This generation can be carried out by changing the training sets [11], changing the input features [12], [10], or changing the parameters and architecture of a base classifier [13].

B. Backpropagation Neural Network

A neural network is as a computational structure that consists of parallel interconnections of neural processors, which have adaptation ability. Backpropagation neural network is a neural network that commonly used. Fig. 1 shows an example of a backpropagation neural network that used in this research. It consists of C_0 input unit, C_1 and C_2 neurons in the hidden layer 1 and 2 respectively, and also C_3 neurons in the output layer.

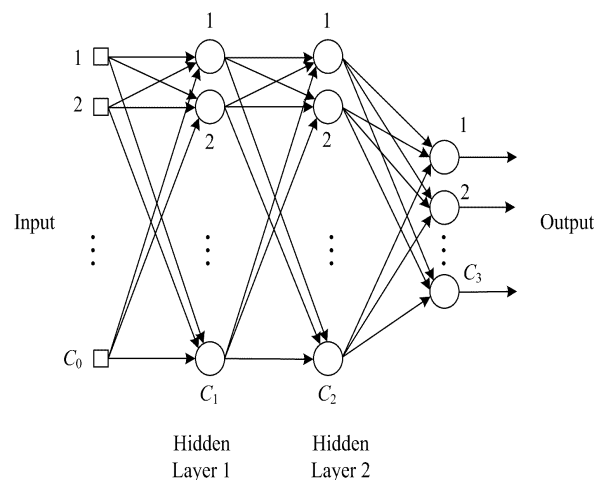


Figure. 1. An example of a backpropagation neural network with two hidden layers.

1) *Training*: Neural network in Fig. 1 needs to be trained first, before it can be used in recognizing the input. Resilient propagation [14] is one of many training algorithms to train it.

2) *Initial weights*: One thing that carried out during the early step neural network training is assigning the initial weights of the neurons. The choice of the weights will influence the convergence rate or even the convergence failure of the neural network training [16].

- a) If the initial weights are set at the same values, the resulted error values will be constant over all training period. This situation will cause the neural network training trapped in the saturation that resist weights changing. Therefore, it can be judged that a convergence failure has been happened.
- b) If the initial weights are set at the different values (however they are inappropriate), it will cause a phenomenon called premature saturation [15]. This phenomenon refers to a situation where the resulted error values almost constant over a training period. This phenomenon cannot be judged as a local minimum, since error value will be reduced after that almost constant period over. This premature saturation phenomenon will slow down the convergence rate.

In order to avoid the two things above, in general practice, researchers used initial weights from random numbers that uniformly distributed in the small range [16].

3) *Random Numbers and Random Seeds*: One of computer property is deterministic property. Therefore, it cannot generate the real random numbers. Computer uses a pseudorandom generator, in order to mimic the real random number generator. By using this kind of generator, it can be generated a series of exact pseudorandom numbers, as long as the generator is initialized using the same initial number. This initial number called random seed.

When a process that make use a series of pseudorandom numbers is executed, it is possible to get an identical track record of the process. The neural network also makes use a series of pseudorandom numbers in the training process. Therefore, it is possible to get an identical track record of the training process, even though the training process is repeated again. On the other hand, by using a different series of pseudorandom numbers in the training process, it is possible to get a different track record of the training process. In the neural network training, a different track record means a different neural network, since it will has a different performance.

III. RESEARCH METHODOLOGY

A. Materials and Equipments

Materials in this research are isolated handwritten characters in binary format. These materials came from data acquisition sheets scanned at resolution of 300 dpi. The data were taken from 100 writers, from various levels of age (10 to 70 years) and sex. From 100 writers, each of them wrote 78 characters, which divided into three groups where each group consists of 'a' to 'z' characters. Therefore, there were 7,800 isolated character images. Equipments in this research was a set of computer based on processor Intel Core2Duo E7500 (2,93GHz) and 4GB RAM, that equipped with MATLAB software.

B. System Development

By using materials and equipments above, a system of handwritten character recognition has been developed (see Fig. 2). In that system, the input is an isolated character image in binary format, whereas the output is a character in the text format.

1) *Character Normalization*: Character normalization in Fig. 2 is carried out in order to correct problems of slant, size, shift, and stroke-width. In this research character normalization from Sumarno [17] was used. Fig. 3 shows some steps in character normalization.

In Fig. 3, the input is an isolated handwritten character in binary format, whereas the output is normalized handwritten character in binary format which has 64x64 pixels in size. Sumarno [17] suggested the following parameters.

- a) Slant correction was carried out by using evaluation of vertical projection histogram of handwritten character that had been undergone shearing operation by using shearing coefficients $\{-0.4, -0.35, \dots, 0.4\}$.
- b) Character scaling was set to 48x48 pixels.
- c) The template size was set to 64x64 pixels.
- d) Thinning operation used thinning algorithm from Zhang-Suen [18].
- e) Dilation operation used square structure-element 3x3.

2) *Feature Extraction*: Feature extraction is a process to extract features that exist in each of the character image. In this research feature extraction from Sumarno [17] was used. Fig. 4 shows some steps in feature extraction.




Figure 2. A character recognition system.

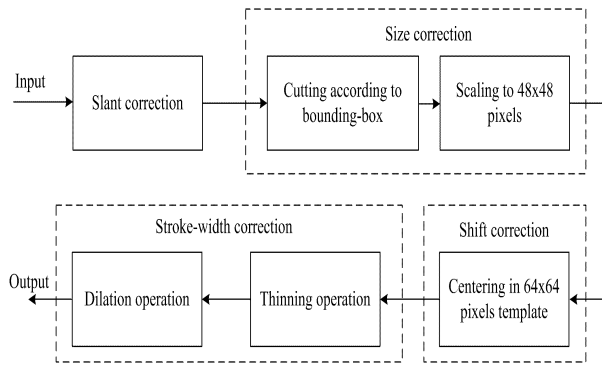


Figure 3. A character normalization steps.

In Fig. 4, the input is normalized character in binary format that has 64x64 pixels in size. The output is a set of values that represents the input image that has 64 elements. Sumarno [17] suggested the following parameters for the feature extraction steps.

- a) Low-pass filtering used 2D Gaussian filter 14x14 with standard deviation 10.
- b) Block partition used 8x8 pixels block size.

3) *Character Recognition*: Character recognition is a process to recognize a character. In order to recognize it, a recognition method based on a backpropagation neural network was used. Backpropagation neural networks in this research are described in detail as follow [17].

- a) Neural network with 2 hidden layers was chosen. It was chosen because after the evaluation of neural network with 1 and 2 hidden layers, the neural network with 2 hidden layers gave the highest recognition rate.
- b) Input layer has 64 neurons that correspond with the number of feature extraction elements.
- c) Output layer has 26 neurons that correspond with the number of alphabet characters 'a' to 'z'. Transfer function in this layer is unipolar sigmoid, that correspond with the network output i.e. in the range of 0 to 1.
- d) The hidden layers 1 and 2 have 64 and 312 neurons respectively. The number of neurons in each hidden layer were found from an evaluation procedure, where by using 64 and 312 neurons in hidden layer 1 and 2 respectively, it gave the highest recognition rate.
- e) Transfer functions in each hidden layer is bipolar sigmoid, that correspond with internal data processing in neural network which in the range -1 to 1.

Remarks

- a) Sigmoid function is a function that commonly used in a backpropagation neural network [20].
- b) Training of a backpropagation neural network can be more effective by using bipolar data processing in the range of -1 to 1 [19].




Figure 4. Feature extraction steps.

Patterns in training and testing

Patterns that used in training and testing the neural network were images of isolated handwritten character, which come from 100 persons that further processed into three pattern sets as follows [17].

a) Training set

This set used in training (in updating the neuron's weights). This set consists of 13,000 patterns as follows.

- i) There are 2,600 corrected patterns from group 1.
- ii) There are 5,200 corrected patterns from group 2. They come from corrected patterns from group 2 that rotated -5^0 and 5^0 .
- iii) There are 5,200 corrected patterns from group 3. They come from corrected patterns from group 3 that rotated -10^0 and 10^0 .

Remarks

- i) Every group consists of 2,600 patterns.
- ii) Corrected patterns are original patterns that have undergone slant, size, shift, and stroke width corrections.
- iii) It was assumed that the rotation in input patters is in the range of -10^0 to 10^0 .

b) Validation set

This set also used in training (in stopping the training process). They consist of 2,600 corrected patterns from group 2.

c) Test set

This set used in testing the trained neural network. They consist of 2,600 corrected patterns from group 3.

Training algorithm

The neural network was trained by using resilient backpropagation algorithm [14]. This algorithm is the fastest algorithm for pattern recognition [21]. Stopping criterion in training was made use of validation, in order to avoid under-training or over-training.

Pseudorandom and random seed

Neural network needs random initial weights in order to start the training. The computer generates these initial weights. However, since the computer cannot generate the real random numbers, therefore the pseudorandom numbers were used as initial weights. In this research, that pseudorandom numbers have the following properties.

- a) Distribution : uniform [16].
- b) Range : -1 to 1 (since bipolar sigmoid function has limit numbers -1 and 1).
- c) Repeatability : 2^{1492} (built-in in the MATLAB software).

Initial weights in each layer of neural network should be different, in order to remove correlation between layers. Therefore, random seed values that used in generating pseudorandom numbers in each layer should also be different. In this research, random seed values that used in hidden layers 1, 2 and output layer were i (i are integer numbers), $i+1$ and $i+2$ respectively [6].

IV. TESTING AND DISCUSSIONS

Experiments below were carried out by using a number of backpropagation neural networks, which have the same architecture and also the same training sets. The difference in each experiment only in terms of random seeds evaluation range. In the first experiment, there were 5 neural networks that trained using random seeds evaluation range 1 to 5. Table I shows the results of the first experiment. Based on the Table I(B), if we choose top 3, 4, and 5 neural networks, they will give average recognition rate 87.68, 86.56, and 86.25 respectively.

In the second experiment, Table I was expanded by training 10 neural networks using random seeds evaluation range 1 to 10. Table II shows the results of the second experiment. Based on the Table II(B), if top 3, 4, and 5 neural networks are chosen, they will give average recognition rate 87.08, 86.98, and 86.88 respectively.

In the third experiment, Table II was expanded by training 15 neural networks using random seeds evaluation range 1 to 15. Table III shows the results of the third experiment. Based on the Table III(B), if top 3, 4, and 5 neural networks are chosen, they will give average recognition rate 87.26, 87.12, and 87.03 respectively.

TABLE I. (A) TRAINING RESULTS OF 5 NEURAL NETWORKS THAT TRAINED USING RANDOM SEEDS EVALUATION RANGE 1 TO 5; (B) SORTING OF (A) BASED ON RECOGNITION RATE IN DESCENDING MANNER

Neural network number	Random seed	Recognition rate (%)
1	1	87.39
2	2	87.15
3	3	85.00
4	4	86.69
5	5	85.00

Neural network number	Recognition rate (%)	Random seed
1	87.39	1
2	87.15	2
3	86.69	4
4	85.00	3
5	85.00	5

In the fourth to sixth experiments there were 15, 20, 25, and 30 neural networks that trained using different random seeds evaluation ranges. They were trained using random seeds evaluation ranges of 1 to 20, 1 to 25, and 1 to 30 respectively. The results of top 3, 4, and 5 chosen neural networks in terms of average recognition rate are shown in the Table IV. The results of random seed evaluation ranges 1 to 5 and 1 to 10 are shown also in the Table IV.

TABLE II. (A) TRAINING RESULTS OF 10 NEURAL NETWORKS THAT TRAINED USING RANDOM SEEDS EVALUATION RANGE 1 TO 10; (B) SORTING OF (A) BASED ON RECOGNITION RATE IN DESCENDING MANNER.

Neural network number	Random seed	Recognition rate (%)
1	1	87.39
2	2	87.15
3	3	85.00
4	4	86.69
5	5	85.00
6	6	86.38
7	7	85.62
8	8	86.69
9	9	86.31
10	10	86.46

Neural network number	Recognition rate (%)	Random seed
1	87.39	1
2	87.15	2
3	86.69	4
4	86.69	8
5	86.46	10
6	86.38	6
7	86.31	9
8	85.62	7
9	85.00	3
10	85.00	5

TABLE III. (A) TRAINING RESULTS OF 15 NEURAL NETWORKS THAT TRAINED USING RANDOM SEEDS EVALUATION RANGE 1 TO 15.

Neural network number	Random seed	Recognition rate (%)
1	1	87.39
2	2	87.15
3	3	85.00
4	4	86.69
5	5	85.00
6	6	86.38
7	7	85.62
8	8	86.69
9	9	86.31
10	10	86.46
11	11	82.08
12	12	85.62
13	13	85.62
14	14	86.00
15	15	87.23

TABLE III. (CONTINUED) (B) SORTING OF (A) BASED ON RECOGNITION RATE IN DESCENDING MANNER.

(B)		
Neural network number	Recognition rate (%)	Random seed
1	87.39	1
2	87.23	15
3	87.15	2
4	86.69	4
5	86.69	8
6	86.46	10
7	86.38	6
8	86.31	9
9	86.00	14
10	85.62	7
11	85.62	12
12	85.62	13
13	85.00	3
14	85.00	5
15	82.08	11

Based on the Table IV, it can be seen that if 3 or 4 neural networks are chosen, at least a random seeds evaluation range 1 to 20 is needed, whereas if 5 to 7 neural networks are chosen, at least a random seeds evaluation range 1 to 25 is needed. These cases are happened because certain random seed values that give high recognition rates are randomly distributed. However, there are limits in its distribution range. For example, for 3 and 4 neural networks, the limit is at 20 random seeds (for random seeds evaluation range 1 to 20), whereas for 5 to 7 neural networks, the limit is at 25 random seeds (for random seeds evaluation range 1 to 25).

Based on the Table IV, in general, it can be said that if more neural networks are chosen, the wider range of random seeds evaluation is needed. As a lower limit, a random seeds evaluation range 1 to 20 is needed, if 3 or 4 neural networks are chosen.

V. CONCLUSION

Based on the above discussions, there are two conclusions as follow.

- A new study about the influence of random seeds evaluation range in choosing a number of backpropagation neural networks as classifier combination members has been carried out. In this case, these neural networks have the same architecture but different weight sets.
- In general, it can be said that if more neural networks are chosen, the wider range of random seeds evaluation is needed. As a lower limit, a random seeds evaluation range 1 to 20 is needed, if 3 or 4 neural networks are chosen.

TABLE IV. AVERAGE RECOGNITION RATE OF CHOSEN NEURAL NETWORKS (IN %)

Number of chosen neural networks	Random seeds evaluation range					
	1 to 5	1 to 10	1 to 15	1 to 20	1 to 25	1 to 30
3	87.08	87.08	87.26	87.28	87.28	87.28
4	86.56	86.98	87.12	87.25	87.25	87.25
5	86.25	86.88	87.03	87.22	87.23	87.23
6	-	86.79	86.94	87.13	87.21	87.21
7	-	86.72	86.86	87.07	87.16	87.16
8	-	86.59	86.79	87.01	87.11	87.13
9	-	86.41	86.70	86.95	87.06	87.08
10	-	86.27	86.59	86.89	87.02	87.05

Remarks: random seed evaluation range 1 to 5, 1 to 10, 1 to 15, 1 to 20, 1 to 25, and 1 to 30 are correspond with the number of evaluated neural networks 5, 10, 15, 20, 20, and 30 respectively.

REFERENCES

- J. Kittler and F. Rolli, editors, Proceeding of the First International Workshop on Multiple Classifier Systems, Cagliari, Italy, 2000.
- J. Kittler and F. Rolli, editors, Proceeding of the Second International Workshop on Multiple Classifier Systems, Cambridge, UK, 2001.
- Y. Chim, A. Kasim, and Y. Ibrahim, "Dual classifier system for handprinted alphanumeric character recognition", Pattern Analysis and Applications, vol. 1, 1998, pp. 155-162.
- L. Lam and C. Y. Suen, "Structural classification and relaxation matching of totally unconstrained handwritten zip-code numbers", Pattern Recognition, vol. 21, no. 1, 1998, pp. 19-31.
- S. Gunter, Multiple Classifier Systems in Offline Cursive Handwriting Recognition, PhD Thesis, Institute for Computer Science and Applied Mathematics, University of Bern, German, 2004, unpublished.
- L. Sumarno, "Generating a combination of backpropagation neural networks by means of random seeds evaluation", Proceeding of 12th International Conference on QiR (Quality in Research), Bali, Indonesia, 2011, pp. 282-287.
- L. Hansen, and O. Salomon, "Neural network ensembles". IEEE Transactions on Pattern Recognition and Machine Analysis, vol 12, no. 10, 1990, pp. 993-1001.
- A. Krogh, and J. Vedelsby, "Neural networks ensembles, cross validations, and active learning", Advances in Neural Information Processing Systems, G. Tesaro et.al. (editor), MIT Press, vol. 7, 1995, pp. 231-238.
- S. Hashem, "Optimal linear combinations of neural networks", Neural Networks, vol. 10, no. 4, 1997, pp. 599-614.
- D. W. Optiz, "Feature selection for ensembles", Proceeding of 16th International Conference on Artificial Intelligence, 1999, pp. 379-384.
- L. Breiman, "Bagging predictors", Machine Learning, vol. 24, no. 2, 1996, pp 123 - 140.
- T.K. Ho, "The random subspace method for constructing decision forests", IEEE Transactions on Pattern Analysis and Machine Intelligence, vol. 20, no. 8, 1998, pp.832 - 844.
- D. Partridge, and Y. B. Yates, "Engineering multiversion neural-net systems", Neural Computation, vol. 8, no. 4, 1996, pp. 869-893.
- M. Riedmiller, and H. Braun, "A direct adaptive method for faster backpropagation learning: the RPROP algorithm", Proceedings of the IEEE International Conference on Neural Networks, 1993, pp. 586-591.
- Y. Lee, S. Oh, and M.Kim, "The effect of initial weights on premature saturation in backpropagation learning", International

Joint Conference on Neural Networks, Seattle, Washington, USA, vol. 1, 1991, pp.765-770.

- [16] S. Haykin, *Neural Networks : A Comprehensive Foundation*, New Jersey: Prentice-Hall International Inc., 1994.
- [17] L. Sumarno, "On the performance of blurring and block averaging feature extraction based on 2D Gaussian filter", *Proceeding of 5th International Conference on Information and Communication Technology and Systems (ICTS)*, Surabaya, Indonesia, 2009, pp. 261-266.
- [18] T.Y. Zhang, T.Y. and C. Y. Suen, "A fast parallel algorithm for thinning digital patterns", *Communication of The ACM*, vol. 27, no. 3, 1984, pp. 236-239.
- [19] I. Suhardi, *Evaluation of Artificial Neural Network for Handwritten Character Recognition Handprinted Style (Evaluasi Jaringan Syaraf Tiruan untuk Pengenalan Karakter Tulisan Tangan Jenis Cetak)*, Master Thesis, Electrical Engineering, Gadjah Mada University, Yogyakarta, Indonesia, 2003, unpublished.
- [20] L. Fausett, *Fundamentals of Neural Networks*, New Jersey: Prentice Hall International Inc., 1994.
- [21] The Mathworks Inc., *Neural Network Toolbox: For Use With MATLAB, Version 5*, Massachussets: The Mathworks Inc., 2005.